




IP65 range of watertight enclosures from 4 to 72M with smoked transparent door. The main technical features are: reversible front and back panel, removable frames and panels with windows and detachable doors with up to 180° opening and lock accessory. The enclosures can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)		Kleur	Grijs RAL 7035
Buitenafm. LxHxD (mm)	298x420x140	IP-graad	IP65	
Vermogen-verspreiding (W)	32	Stootbestendigheid	IK09	
Nominale spanning	400 V	Deur kleur	Transparant fumé	
Aantal modules EN 50022	24	Aantal modules EN 50022	24 (12X2)	
Nominale stroom	125 A	Gloeidraadproof	650 °C	
Bedrijfstemperatuur	-25 +60 °C	Type materiaal	Halogeenvrij conform EN 60754-2	
Electrocod	0321	Thermospanning met kogel	70 °C	
Accessoires voor isolatieherstelling	Schroefdroppen (GW44623) of bevestigingsbeugels uit hars (GW44621)	Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	
Isolatie-spanning	1000 V conform EN 62208 zowel bij AC als DC	Max. installeerbare klemmenblokken	2 x 12 modules	




DIMENSIONAL

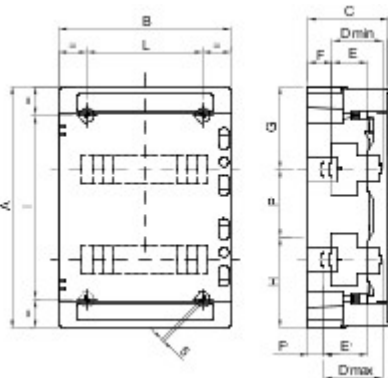

		A	B	C	Dmin	E	F	G	H	P	Dmax	E'	F'	NR	I	L
24M	GW 40 104	420	298	140	75	48	48	147,5	122,5	150	102	75	21	4	320	200
36M	GW 40 105	570	298	140	75	48	48	147,5	122,5	150	102	75	21	4	494	200
	GW 40 107	463	410	140	75	48	48	154	134	175	102	75	21	4	363	310
54M	GW 40 108	655	410	140	75	48	48	162,5	142,5	175	102	75	21	6	293	319
72M	GW 40 109	878	410	160	75	48	48	175	155	200 175	102	75	21	6	394	319

TECHNICAL SYMBOLOGY




IP
IP65

IK
IK09

GWT
650 °C



HF
HALOGEN FREE
Halogeenvrij conform EN 60754-2



STANDARDS/APPROVALS

