




IP65 range of watertight enclosures from 8 to 72M with smoked transparent door and equipped with screw wiring multipolar terminal blocks, 80 A and IP20. The main technical features are: reversible front and back panel, removable frames and panels with windows and detachable doors with up to 180° opening and lock accessory. The terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)		Kleur	Grijs RAL 7035
Buitenafm. LxHxD (mm)	410x878x160	IP-graad	IP65	
Vermogen-verspreiding (W)	89	Stootbestendigheid	IK09	
Nominale spanning	400 V	Deur kleur	Transparant fumé	
Klemmenblokken	80 A - IP20 tweepolige gaten met schroeven	Aantal modules EN 50022	72 (18x4)	
Nominale stroom	125 A	Gloeidraadproef	650 °C	
Bedrijfstemperatuur	-25 +60 °C	Type materiaal	Halogeenvrij conform EN 60754-2	
Electrocod	0321	Thermospanning met kogel	70 °C	
Accessoires voor isolatieherstelling	Schroefdooppen (GW44623) of bevestigingsbeugels uit hars (GW44621)	Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	
Isolatie-spanning Pool 2 (mm ²)	1000 V conform EN 62208 zowel bij AC als DC	Pool 1 (mm ²)	N/E 2x[(3x16) + (17x10)]	



DIMENSIONAL

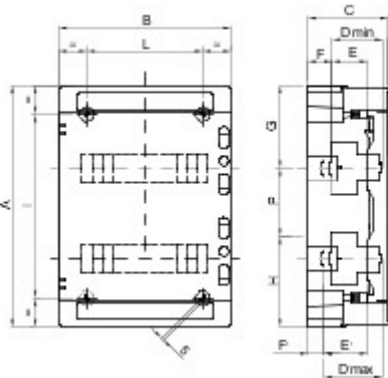

		A	B	C	Dmin	E	F	G	H	P	Dmax	E'	F'	NR	I	L
24M	GW 40 104	420	298	140	75	48	48	147,5	122,5	150	102	75	21	4	320	200
36M	GW 40 105	570	298	140	75	48	48	147,5	122,5	150	102	75	21	4	494	200
	GW 40 107	463	410	140	75	48	48	154	134	175	102	75	21	4	363	310
54M	GW 40 108	655	410	140	75	48	48	162,5	142,5	175	102	75	21	6	293	319
72M	GW 40 109	878	410	160	75	48	48	175	155	200 175	102	75	21	6	394	319

TECHNICAL SYMBOLOGY

 II (conform de norm IEC 61140)	 IP65	 IK09	 650 °C	 -25 +60 °C	 Halogeenvrij conform EN 60754-2	 70 °C	 EN 62208 1000 V conform EN 62208 zowel bij AC als DC
---	---	---	---	---	--	--	--

STANDARDS/APPROVALS



