


Boven- ingangen	2xØ 23	Gloeidraadproef	650 °C
IP- graad	IP67	Stoot- bestendigheid	IK08
Bodem- ingangen	1xØ 29/37	Electrocod	2222
Residentiële IB-contactdozen	N. 1 IEC 309 16-32 A IP44/67 + N.1 16 A MAX 3P+E of GW274		Minimale installatietemperatuur -25 °C

DIMENSIONAL

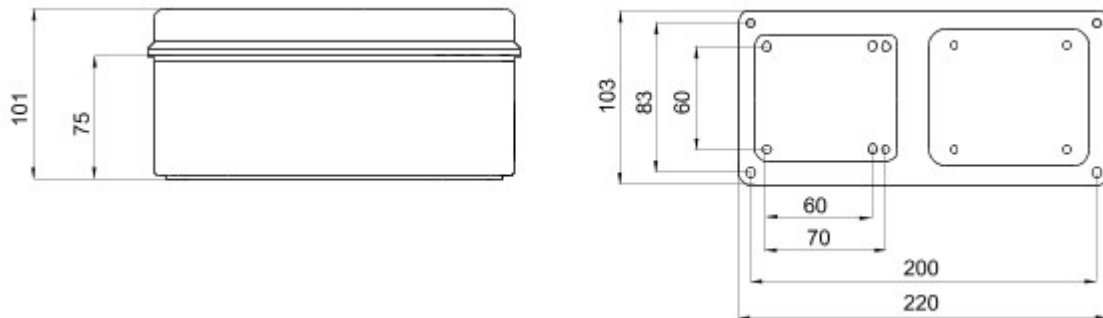

TECHNICAL SYMBOLOGY

GWT **IP** **IK**

650 °C

IP67

IK08

STANDARDS/APPROVALS

