




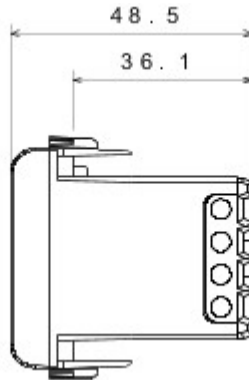

Wide range of control devices, sockets for power supply (conforming to national and international standards) signal pick-up, climate control, comfort management, technical alarm signalling and emergency lighting management. The ChoruSmart modular devices are available in five colours, glossy white, satin white, natural beige, satin black and lacquered titanium and in various sizes from 1/2, 1, 2 and 3 modules. Thanks to the mounting supports for rectangular, square and round boxes, endless combinations can be created with the ChoruSmart range of plates.

Categorie	Relais	Uitgang contacten	10 AX 250 V AC
Type	Vergrendelingsrelais, 4 seq.	Kleur	Natural satin beige
Omschrijving	Vergrendelingsrelais	Aantal polen	2P
Spanning	230 V AC	Standaard	EN 60669-1 / EN 60669-2-2
Frequentie	50/60 Hz	Bestendigheid bij testspanning	2000 V bij 50 Hz gedurende 1 minuut
Isolatieweerstand	> 5 MOhm	Aansluitklemmen voor bekabeling	Met schroef
Verlengd bedrijf (aantal positiewijzigingen)	40.000 bij In 250 V AC cosφ=0,6	Thermospanning met kogel	125 °C
Gloeidraadproef	850 °C	Klemgreep op kabeltractie	> 50 N
Aanspanvermogen aansluitklem flexibele kabels (mm <sup>2</sup> )	1x4 / 2x2,5	Aanspanvermogen aansluitklem starre kabels (mm <sup>2</sup> )	2x2,5
Aantal modules	1	230V incandescent-halogen lamps	1000 W
Fluorescent lamps with electronic ballast	400 W	Fluorescent lamps with compensated ballast	360 W
CFL lamps	200 W	230V LED lamps	200 W
Halogen/LED lamps with electronic transformer	200 W	Halogen/LED lamps with electromechanical transformer	400 W
Materiaal	Technopolymeer	Electrocod	140

### DIMENSIONAL



### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS



