




Wirelessly connected device with Zigbee protocol from the ChoruSmart system. It can be used with Home Gateway for "CONNECTED SMART HOME" solutions and with Smart Gateway for "HOME AND BUILDING PRO" solutions. Ideal for residential and small commercial offices, new builds and renovations. Zigbee technology is a secure and reliable technology in which data is encrypted and every node within the network ensures reachability across all devices (mesh network). This device can also be used without Home Gateway and Smart Gateway (manual configuration with dip-switch or via IoT Configurator), in which case supervision via the app is not possible.

Categorie	Contacts interface	Communicatieprotocol	Zigbee (IEEE 802.15.4)
Voedings- spanning	Door batterij gevoed	Voeding batterijen	CR2032 replaceable
Output power	8 dBm	Aantal ingangs- kanalen	2
Ingangs- spanning	Potentiaalvrij	Max. kabel lengte	15 m
Standaard	2014/53/EU, EN 60669-2-1, EN 60669-1, ETSI EN 300-328	IP- graad	IP20
Bedrijfs- temperatuur	-5 ÷ +45 °C	Opslagtemperatuur	-25 ÷ +70 °C
Relative humidity (non-condensative)	Max 93%	Afmetingen LxHxD (mm)	42x40x20
Electrocod	051A		

DIMENSIONAL

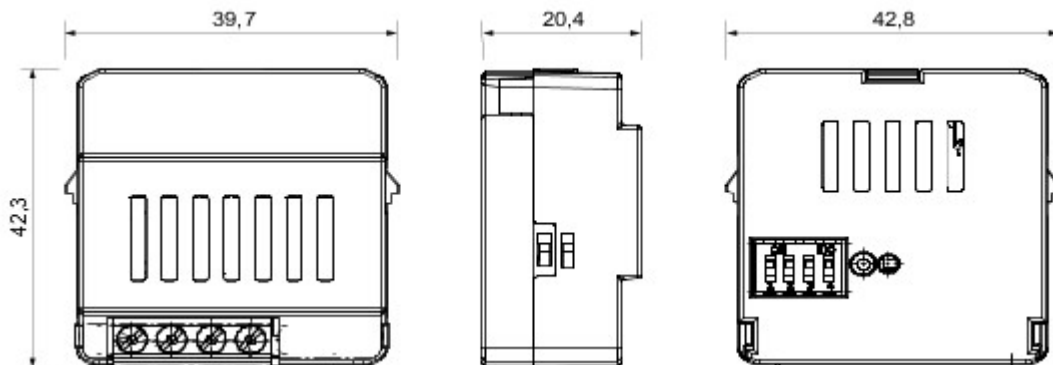

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

