




Wirelessly connected device with Zigbee protocol from the ChoruSmart system. It can be used with Home Gateway for "CONNECTED SMART HOME" solutions and with Smart Gateway for "HOME AND BUILDING PRO" solutions. Ideal for residential and small commercial offices, new builds and renovations. Zigbee technology is a secure and reliable technology in which data is encrypted and every node within the network ensures reachability across all devices (mesh network). This device can also be used without Home Gateway and Smart Gateway (manual configuration with dip-switch or via IoT Configurator), in which case supervision via the app is not possible.

Categorie	Window sensor	Kleur	Wit
Materiaal	Kunststof	Communicatieprotocol	Zigbee (IEEE 802.15.4)
Voedings- spanning	Door batterij gevoed	Voeding batterijen	2 x AAA replaceable
Sensor type	Magnetische	Output power	3 dBm
Temperatuursensor	0...50 °C	Standaard	2014/53/EU, EN 60669-2-1, ETSI EN 300 328
IP- graad	IP40	Bedrijfs- temperatuur	0 ÷ +50 °C
Opslagtemperatuur	-20 ÷ +80 °C	Relative humidity (non-condensative)	10 ÷ 95%
Afmetingen LxHxD (mm)	76x26x17	Electrocod	051A

#### DIMENSIONAL

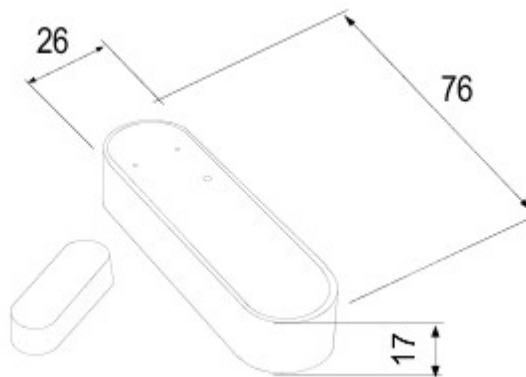

#### TECHNICAL SYMBOLOGY

**IP**

IP40

#### STANDARDS/APPROVALS

