

### ELIA AL



ELIA AL is a flush-mounting LED device for accent lighting in commercial areas and offices, composed of a white powder-coated die-cast aluminium frame and 2 different optics (36° and 60°) that guarantee a UGR of less than 19. The range is available in two sizes, with a colour temperature of 3,000K (warm white) or 4,000K (neutral white), a colour rendering index of more than 80 or more than 90 and the option of an electronic power supply with On/Off or DALI command. This modular flush-mounting solution features a rotosymmetrical optic equipped with a passive heat removal system, in die-cast aluminium. Installation is quick and easy, thanks to the reduced weight of the device, the bayonet coupling and the simple wiring, with the connector located on the device and remote power supply included.

#### GENERAL INFORMATION

Context	Interior lighting
Luminaire	LED luminaire for accentuation
Toepassing	Intern
Unique digital code (Datamatrix)	Currently not present
Kleur	Wit
Type lichtbron	LED
System vermogen	18 W
LED Lifetime	L80B50 (Tq25°) = 50.000h
Gewicht (kg)	0.5
Garantie	5 jaar
Opslagtemperatuur	-20° +65°
Operating temperature	-20° +45°

#### OPTIC AND ILLUMINATING FEATURES

Optiek	36°
Unified Glare Rating	UGR<19
Lumen-vermogen (lm)	1800
Efficacy (lm/W)	100
Kleur temperatuur	4000 K
Colour Rendering Index	CRI 90
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0
Standaard	EN 60598-1; EN 60598-2-2; IEC/TR 62778; EN 62493

#### MATERIALS

Body	Gietaluminium
Type plaat	-
Optic	High-efficiency reflector
Gasket	-
Locking Hook	-
External screw	-
Colour	Powder coating


#### ELETRICAL AND LIGHTING FEATURES

Voedings-spanning	220-240 V
Nominale frequentie (Hz)	50 / 60
Driver	External - Included
Driver failure rate	F025 (Tq=25°C) = 50.000 h
Overvoltage protection	DM 0,5 kV
Control System	DALI
Mounting and installation	Voor inbouw-
Tilt	-
Wiring	With connection terminal on driver
Bevestiging	Via springs integrated with the luminaire
Light source replaceability	Non-replaceable
Controlgear replaceability	By professional
Driver Box	-
Maximum surface exposed to the wind	-
Isolatie-klasse	II
IP-graad	IP40 - IP54
Stootbestendigheid	IK06
Glow Wire Test	850 °C


#### STANDARDS AND APPROVALS

Classificering	-
Toestel met verlaagde oppervlaktetemperatuur	-
DIN 18032-3-certificering	-
IPEA	-
IP-klasse	II
IP-graad	IP40 - IP54
Stootbestendigheid	IK06
Glow Wire Test	850 °C

#### DIMENSIONAL

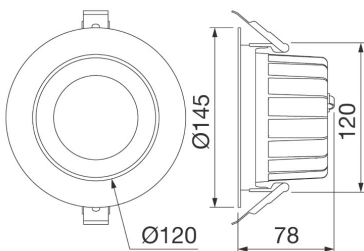

#### PHOTOMETRIC DISTRIBUTION



ELIA AL

### TECHNICAL SYMBOLOGY



**IP**

IP40 - IP54

**IK**

IK06

**GWT**

850 °C

### STANDARDS/APPROVALS

**UK  
CA**

