

ELIA DL




Kit for emergency use equipped with Ni-Cd battery with 3h autonomy after 24h of recharge. Equipped with a test button to check the status of the battery, it must be positioned on the luminaire. Warranty 2 years, battery and inverter excluded. Compatible with the following ranges: ELIA AL, ELIA DL and ELIA PL. NOT COMPATIBLE with the ELIA PL IP65 range.

Omschrijving	Emergency kit 3h	Serie	ELIA AL, ELIA DL, ELIA PL, ELIA PL BACKLIT, VISIO [16] - NOT COMPATIBLE WITH ELIA PL IP65
Type	Urgentiekit	Uitvoering	Permanent 3 h
Voeding	4 W	Toepassing	Intern
Bedrijfstemperatuur	0 +25 °C	IP- graad	IP20
Stoot- bestendigheid	IK03	Autonomie	3 h
Bevestiging	Device edge	Isolatie- klasse	II
Voeding batterijen	Replaceable	Spanning	220-240 V - 50/60 Hz
Oplaadtijd	24 h	Gewicht (kg)	0.8
Electrocod	2419		

DIMENSIONAL

PHOTOMETRIC DISTRIBUTION

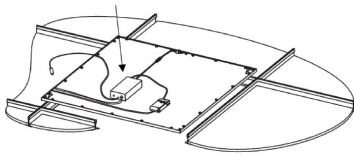

TECHNICAL SYMBOLOGY



IP

IP20

IK

IK03



STANDARDS/APPROVALS

