





ELIA PL is a LED lowbay for lighting offices, available in square or rectangular versions with a frame in white powder-coated die-cast aluminium and two types of PMMA shield, a high-efficiency micro-prism version with a UGR of less than 19 and an opal version with an UGR of 22. ELIA PL can be flush-mounted in false ceilings with standard panels, or alternatively, can be ceiling or suspension-mounted using the accessories provided separately. The family of products is available with a colour temperature of 3,000K (warm white) or 4,000K (neutral white), a colour rendering index of more than 80 or more than 90 and a separate electronic power supply supplied as part of a kit, in On/Off or DALI versions. ELIA PL is easy to install thanks to the reduced weight of the device and the connector for electrical wiring which enables connection to the remote power supply.

GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES	
Context	Interior lighting	Optiek	Wide opal
Luminaire	Modular LED luminaire	Unified Glare Rating	UGR<22
Toepassing	Intern	Lumen-vermogen (lm)	3300
Unique digital code (Datamatrix)	Currently not present	Efficacy (lm/W)	100
Kleur	Wit	Kleur temperatuur	3000 K
Type lichtbron	LED	Colour Rendering Index	CRI 90
System vermogen	33 W	Standard Deviation Colour Matching	SDCM = 3
LED Lifetime	L80B50 (Tq25°) = 50.000h	Photobiological Risk Class	RG0
Gewicht (kg)	2.4	Standaard	EN 60598-1; EN 60598-2-2; IEC/TR 62778; EN 62493
Garantie	5 jaar	ELETRICAL AND LIGHTING FEATURES	
Opslagtemperatuur	-20° +65°	Voedings-spanning	220-240 V
Operating temperature	-20° +45°	Nominale frequentie (Hz)	50 / 60
MATERIALS		Driver	External - Included
Body	Aluminium	Driver failure rate	F025 (Tq=25°C) = 50.000 h
Type plaat	PMMA	Overvoltage protection	DM 1 kV
Optic	High-diffusion opalescent diffuser	Control System	ON / OFF
Gasket	-	INSTALLATION AND MAINTENANCE	
Locking Hook	-	Mounting and installation	Recessed (ceiling-mounted and hanging require separately ordered accessories)
External screw	-	Tilt	With suspension adjustment Kit
Colour	Powder coating	Wiring	With connection terminal on driver
STANDARDS AND APPROVALS		Bevestiging	Free-standing or via separately ordered accessories
Classificering	-	Light source replaceability	Non-replaceable
Toestel met verlaagde oppervlaktetemperatuur	-	Controlgear replaceability	By professional
DIN 18032-3-certificering	-	Driver Box	-
IPEA	-	Maximum surface exposed to the wind	-
Isolatie-klasse	II	-	-
IP-graad	IP20 - IP40	-	-
Stootbestendigheid	IK03	-	-
Glow Wire Test	650 °C	-	-

### DIMENSIONAL

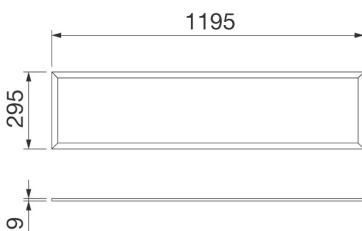

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IP

IK

GWT

## STANDARDS/APPROVALS



Data, measures, designs and pictures are for information purpose only, last update 13/05/2024. They can be changed at any moment, therefore it is always ecommended to read the last updated version published on the website [www.gewiss.com](http://www.gewiss.com). Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.