





Smart [4] is a series of LED indoor appliances suitable for the lighting of industries and sports facilities. It is available in HE (High Efficiency), HLO (High Lumen Output) and integrated DALI Emergency. Three different sizes available: 1M, 2M and 4M. The body is made of "Halogen-free" nylon loaded with grey glass fibre (RAL7035) with vent and anti-condensation device, heat dissipation device in aluminium alloy EN AB 44300. It is equipped with a dual optical system that includes a metallic reflector with ARRAY optics and a metallic reflector with UV stabilized PMMA lenses, with high efficiency, which allow a wide variety of light distributions 30°, 60°, 90°, Asymmetric and Elliptical. The version with through wiring has pre-wired mechanical and electrical connection components. Suspension, wall and projection appliances can be installed. It is available with three types of Colour Temperature (3000K / 4000K / 5700K), Color Rendering Index CRI>80 and two power supply options (ON/OFF or DALI).

| GENERAL INFORMATION                          |   | OPTIC AND ILLUMINATING FEATURES     |   |
|--|---|-------------------------------------|---|
| Context                                      | Lighting for industries and large sports facilities | Optiek                              | Array                                     |
| Luminaire                                    | LED Industrial Reflector                            | Unified Glare Rating                | UGR ≤ 25                                  |
| Toepassing                                   | Intern  | Lumen-vermogen (lm)                 | 39600                                     |
| Unique digital code (Datamatrix)             | Datamatrix  | Efficacy (lm/W)                     | 157                                       |
| Kleur  | Grijs RAL 7035                                      | Kleur temperatuur                   | 4000 K                                    |
| Type lichtbron                               | LED   | Colour Rendering Index              | CRI>80                                    |
| System vermogen                              | 253 W   | Standard Deviation Colour Matching  | SDCM = 3                                  |
| LED Lifetime                                 | L90B10(Tq25°C)>150.000h;<br>L90B10(Tq50°C)=100.000h | Photobiological Risk Class          | RG0                                       |
| Gewicht (kg)                                 | 13.5  | Standaard                           | EN 60598-1 ; EN 60598-2-1 ; EN 60598-2-24 |
| Garantie                                     | 5 jaar  | ELETRICAL AND LIGHTING FEATURES     |   |
| Opslagtemperatuur                            | -40 +70 °C  | Voedings-spanning                   | 220 - 240 V                               |
| Operating temperature                        | -30°C ÷ +50 °C                                      | Nominale frequentie (Hz)            | 50/60 Hz                                  |
| MATERIALS                                    |   | Driver                              | Included                                  |
| Body   | PA6 "Halogen Free" loaded fibreglass                | Driver failure rate                 | F10 = 70.000h Tq25°C/35.000h Tq50°C       |
| Type plaat                                   | Tempered glass Thickness 4mm                        | Overvoltage protection              | DM 6kV / CM 6kV                           |
| Optic  | Metallized polycarbonate reflector                  | Control System                      | ON / OFF                                  |
| Gasket                                       | anti-aging silicone                                 | INSTALLATION AND MAINTENANCE        |   |
| Locking Hook                                 | -   | Mounting and installation           | Ceiling - Wallmounting - Suspension       |
| External screw                               | Roestvrij staal                                     | Tilt                                | With bracket accessory                    |
| Colour                                       | Grijs RAL 7035                                      | Wiring                              | With GW connect watertight connector      |
| STANDARDS AND APPROVALS                      |   | Bevestiging                         | -   |
| Classificering                               | -   | Light souce replaceability          | By professional                           |
| Toestel met verlaagde oppervlaktetemperatuur | Ja  | Controlgear replaceability          | By professional                           |
| DIN 18032-3-certificering                    | With Bracket - Rope Kit + terminal (in approval)    | Driver Box                          | Ingebouwd                                 |
| IPEA   | -   | Maximum surface exposed to the wind | 0,350 m²                                  |
| Isolatie-klasse                              | I   |                                     | -   |
| IP-graad                                     | IP66  |                                     | -   |
| Stootbestendigheid                           | IK08  |                                     | -   |
| Glow Wire Test                               | 850 °C  |                                     | -   |

### DIMENSIONAL

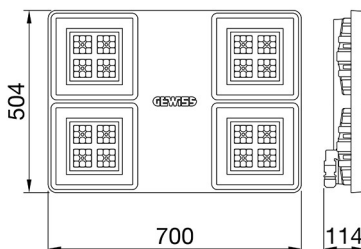

### PHOTOMETRIC DISTRIBUTION





  
0,350 m<sup>2</sup>



**IP**  
IP66

**IK**  
IK08

**GWT**  
850 °C

## STANDARDS/APPROVALS



Data, measures, designs and pictures are for information purpose only, last update 13/05/2024. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website [www.gewiss.com](http://www.gewiss.com). Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.