



SPATIUM PRO

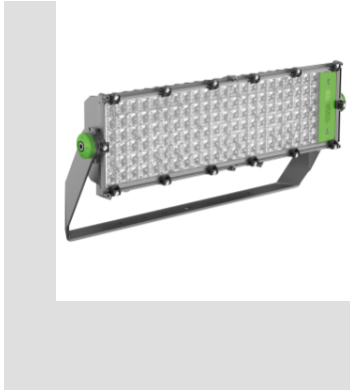


Spatium PRO | 1 is a high-power outdoor LED floodlight suitable for the lighting of outdoor areas such as industrial perimeter areas, pedestrian areas and car parks. The floodlight has a graphite grey finish with trivalent treatment for maximum resistance to oxidation and is equipped with an integrated 'self-cleaning' heat dissipation system. It consists of 1 module, with a bleed and anti-condensation valve, protected from accidental impact. The bracket is made in galvanised steel fixed to the module via screws. The orientation system is enabled by the goniometer integrated into the bracket, which facilitates the pointing phases during installation. The floodlight is available in the following colour temperatures 3,000K, 4,000K or 5,700K and colour rendering CRI>70 (SDCM 5 Step), CRI>80 (SDCM 3 Step). The range also includes 4 types of optics: circular 40°, symmetrical/elliptical optic, and 2 asymmetric optics. The T.I.R.Ex. optic system developed by GEWISS with lenses in PMMA HT (high-transparency), gives complete control over the light beam, allowing for great flexibility for any project design, with high qualitative and quantitative performance. The floodlight is completed with an external power supply unit fixed to the back of the heatsink. The power supply unit, available in the DALI version can be oriented to optimise the heat dissipation depending on the orientation of the motor. It is protected from surges up to 6KV in differential mode and 10KV in common mode.

| GENERAL INFORMATION                             |   | OPTIC AND ILLUMINATING FEATURES     |  |
|---|---|-------------------------------------|--|
| Context   | Large outdoor lighting areas                        | Optiek                              | Asymmetric 60°   |
| Luminaire                                       | High power LED floodlight                           | Unified Glare Rating                | ULOR = 0%  |
| Toepassing                                      | Binnenshuis / buitenshuis                           | Lumen-<br>vermogen (lm)             | 36500  |
| Unique digital code (Datamatrix)                | Currently not present                               | Efficacy<br>(lm/W)                  | 91   |
| Kleur   | Grafiëtgrijs  | Kleur<br>temperatuur                | 5700 K   |
| Type lichtbron                                  | LED   | Colour Rendering Index              | CRI 80   |
| System<br>vermogen                              | 400 W   | Standard Deviation Colour Matching  | SDCM = 3   |
| LED Lifetime                                    | L90B10(Tq25°C)>100.000h;<br>L80B10(Tq25°C)>150.000h | Photobiological Risk Class          | -  |
| Gewicht<br>(kg)                                 | 15  | Standaard                           | EN 60598-1; EN 60598-2-5; IEC/TR 62778;<br>EN 62493              |
| Garantie  | 5 jaar  | ELETRICAL AND LIGHTING FEATURES     |  |
| Opslagtemperatuur                               | -   | Voedings-<br>spanning               | 220 - 240 V  |
| Operating temperature                           | -25 +50 °C  | Nominale<br>frequentie (Hz)         | 50/60 Hz   |
| MATERIALS                                       |   | Driver                              | Included   |
| Body  | Gietaluminium                                       | Driver failure rate                 | F10 = 90.000h Tq25°C   |
| Type plaat                                      | Flat tempered glass 4mm                             | Overvoltage protection              | DM 6 kV / CM 10 kV   |
| Optic   | T.I.R.Ex. Optical PMMA HT                           | Control System                      | DALI   |
| Gasket  | Anti-aging silicone                                 | INSTALLATION AND MAINTENANCE        |  |
| Locking Hook                                    | -   | Mounting and installation           | High-mast lighting - Wall mounting - Ground<br>mounting          |
| External screw                                  | Stainless steel                                     | Tilt                                | Rotation on bracket with integrated<br>goniometer                |
| Colour  | Polyester powder coated                             | Wiring                              | Watertight connector between floodlight and<br>power supply unit |
| STANDARDS AND APPROVALS                         |   | Bevestiging                         | Beugel   |
| Classificering                                  | -   | Light source replaceability         | By professional  |
| Toestel met verlaagde<br>oppervlaktetemperatuur | -   | Controlgear replaceability          | By professional  |
| DIN 18032-3-certificering                       | Available   | Driver Box                          | Extern   |
| IPEA  | -   | Maximum surface exposed to the wind | 0.15 m²  |
| Isolatie-<br>klasse                             | I   |                                     | -  |
| IP-<br>graad                                    | IP66  |                                     | -  |
| Stoot-<br>bestendigheid                         | IK08  |                                     | -  |
| Glow Wire Test                                  | -   |                                     | -  |

DIMENSIONAL

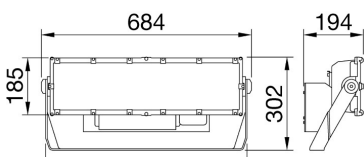


PHOTOMETRIC DISTRIBUTION



Data, measures, designs and pictures are for information purpose only, last update 01/07/2024. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website [www.gewiss.com](http://www.gewiss.com). Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>. - 1 of 2

### SPATIUM PRO



### TECHNICAL SYMBOLOGY



**IP**  
IP66

**IK**  
IK08

**GWT**  
-

### STANDARDS/APPROVALS

