





Omschrijving	Socket with residual current protection
Code	RCD
Aantal polen	1P+N
Kleur	Wit RAL 9016
Nominale stroom	16 A
Nominale restbedrijfsstroom	10 mA
Type	A
Nominale spanning (EN/IEC 61008-1, 61008-2-1)	230/240 V

IP- graad	IP21	Nominale frequentie (Hz)	50 Hz
RCD Delay	Without time delay	Nominale stoot-houdspanning (Uimp)	4 kV
Overspannings- categorie	III	Nominal making and breaking capacity	500 A
Rated conditional short-circuit current	3.000 A	Doorsnede starre kabel	Min 1,5 mm <sup>2</sup> - Max 2,5 mm <sup>2</sup>
Doorsnede flexibele kabel	Min 1,5 mm <sup>2</sup> - Max 2,5 mm <sup>2</sup>	Terminal type	Without screws
Montage- positie	Flush type or surface type	Bedrijfstemperatuur	-5° - +40° (acc. To IEC), -25° - +40° (acc. To EN)
Elektrische weerstand	2000	Mechanische weerstand	4000
Standaard	CEE 7 - standard sheet III	Earth connection	Grounding

### DIMENSIONAL

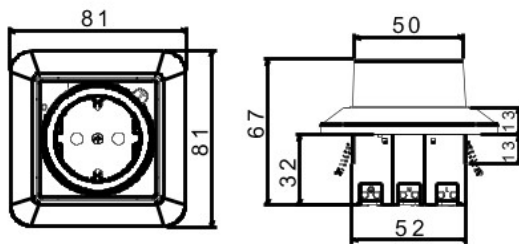

### WIRING DIAGRAM



### STANDARDS/APPROVALS

