




Omschrijving Interruttore automatico scatolato
 Code MSXE 630
 Aantal polen 3P+N
 Nominale stroom 630 A
 Afschakelspoel Elektronisch

ELECTRICAL CHARACTERISTICS

MECHANICAL CHARACTERISTICS

Standaard	IEC/EN 60947-2	Uitvoering	Fisso - Rimovibile
Gebruik categorie	A	DIN rail mounting	Nee
Nominale frequentie (Hz)	50 / 60	Accessoriabile con comando motore	Si
Rated operating voltage (Ue)	690 Vac	Compatible interlock	Lever – Cable
Nominale stoot-houdspanning (Uimp)	8 kV	Terminals supplied	Front FC
Overspannings-categorie	IV	Montage-positie	Elke
Isolatiespanning (Ui)	800 V	Upline/downline power supply	Si
Thermal regulation	0,4 - 0,5 - 0,63 - 0,8 - 0,85 - 0,9 - 0,95 - 1 x In	Electrical life (415Vac)	4.500 cicli
Magnetic regulation	Electronic LSI	Mechanical life	15.000 cicli
Neutral protection	Non protetto	Bedrijfstemperatuur	-5°C +65°C
Total power loss	158.76 W	Opslagtemperatuur	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Gewicht (kg)	6.5
Rated short-time withstand current for 0,3s (Icw)	-	Width	185 mm
I _{dn} regulation	-	Hoogte	260 mm
DT regulation	-	Diepte	103 mm
SERVICE BREAKING CAPACITY (ICU)	-	RATED BREAKING CAPACITY (ICS)	-
220/240Vac	50 kA	220/240Vac	50 kA
400/415Vac	36 kA	400/415Vac	36 kA
440Vac	25 kA	440Vac	25 kA
525Vac	15 kA	525Vac	15 kA
690Vac	10 kA	690Vac	10 kA
250Vdc	-	250Vdc	-

DIMENSIONAL

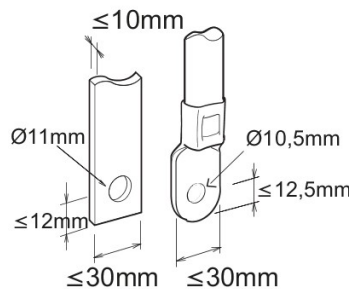

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 01/07/2024

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice