




Wi-Fi communication interface module (GWD0953) must be coupled on the right side of ReStart RD PRO 2P and RM PRO 2P. Thanks to Wi-Fi ReStart APP, you can monitor the system status in real time and everywhere. You can see the values of the energy produced and consumed, the active and reactive power, the current and the voltage of the system.

Omschrijving	Interfacemodule wifi	Code	90 ReStart range
Aantal modules EN 50022	1	Geslacht voor	ReStart Rd PRO 2P / ReStart Rm PRO 2P
Nominale frequentie (Hz)	50	Nominale spanning	230/240 V a.c.
Max. vermogens- verbruik	1,6 W	Bedrijfstemperatuur	-25 +60 °C
Nominale stoot-houdspanning (Uimp)	4 kV	Nominaal aandraaimoment	0,4 Nm
Opslagtemperatuur	-40 +70 °C	Nominale isolatie- spanning (Ui)	500 V
Standaard	EN 61326-1; EN 301489-1; EN 301489-17	Distributiesysteem	TT - TN-S
Doorsnede aansluitklem	2,5 mm ²	Minimum requirements of the operating system	Android 4.4 / iOS 9
Wi-Fi communication	2.4	Maximum Wi-Fi range	100m free space trasmission (towards router) - 80m free space trasmission (other directions)
Maximum measurable current	80 A	CT maximum cable section	25 Quadratmillimeter
Measure of electrical parameters	Ja		

DIMENSIONAL

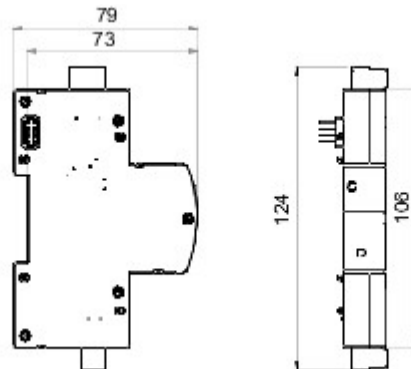

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

