





Smart [PRO]e


GEWISS

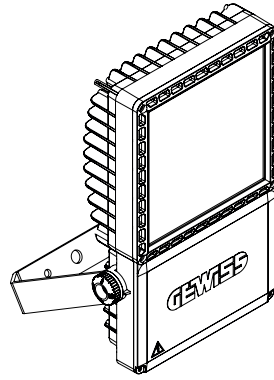


	DIMMING				V_{in}	I_{out}	W	t_a
	1-10V	5,7	0,038 m ²	0,085 m ²	220-240V 50/60Hz	Max 1,4A	150W	Max 40°C



LED CCT	≤ 5700K	
Optics	RG1	
SN	2,5 m	
SM	2,5 m	
SW	2,5 m	
ALW	6 m	
ASW	6 m	

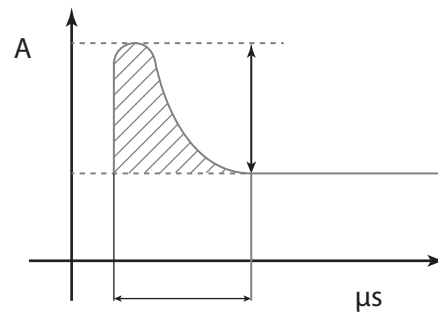


	I_{LED} (mA)	DIMMING	LED driver inrush current peak and width
LED	Max. 1400	1-10V	90,5A / 196 µs

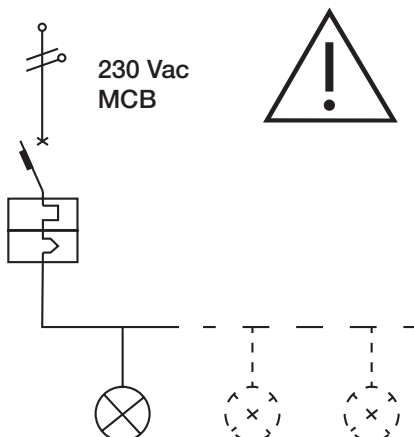


MCB Type B:	10A	16A	20A	25A
	4	7	8	10
MCB Type C:	10A	16A	20A	25A
	7	11	14	18
MCB Type D:	10A	16A	20A	25A
	14	24	32	38






DIMMING 1-10V

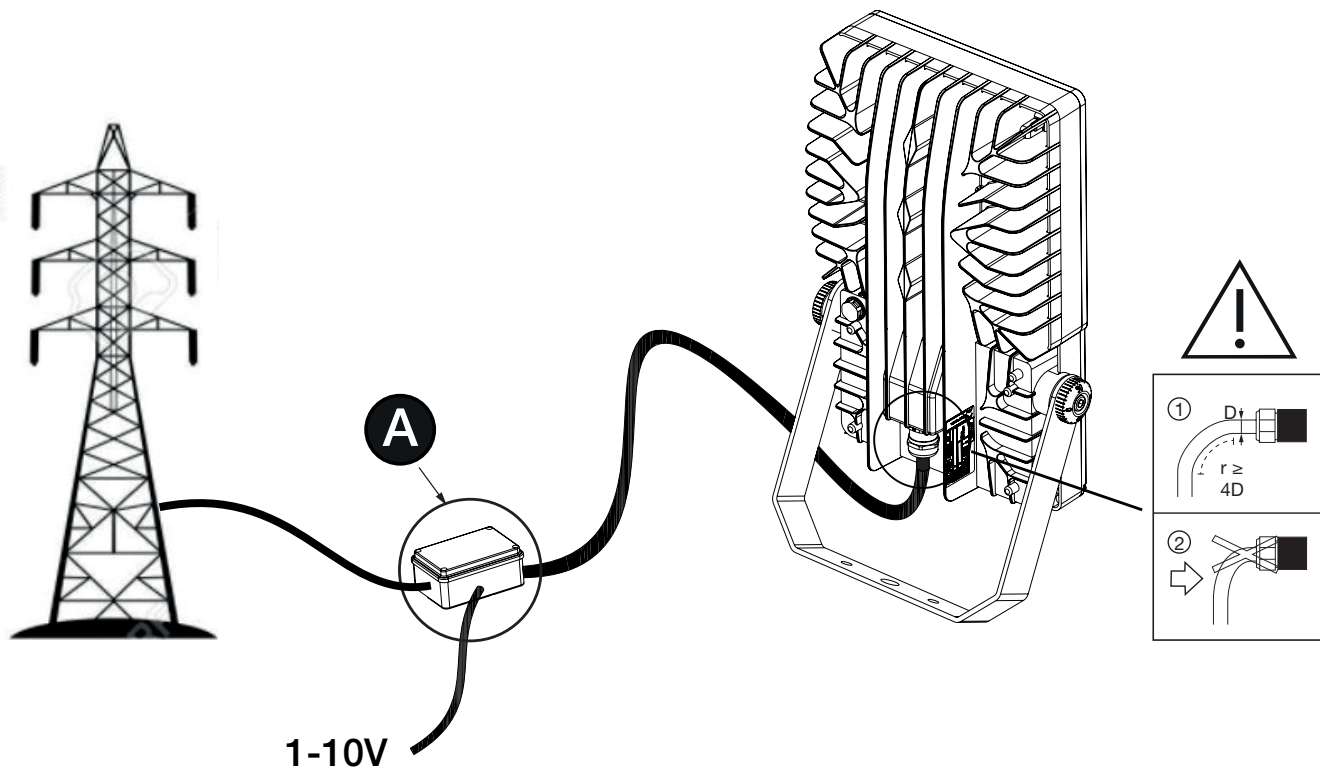



A

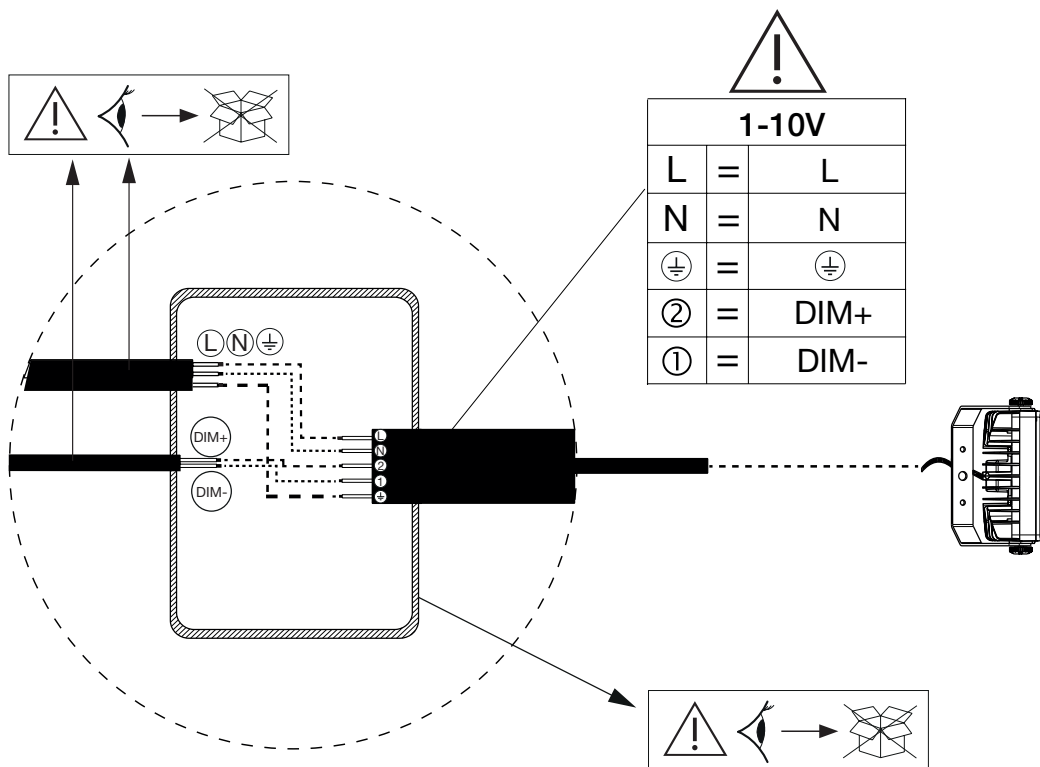

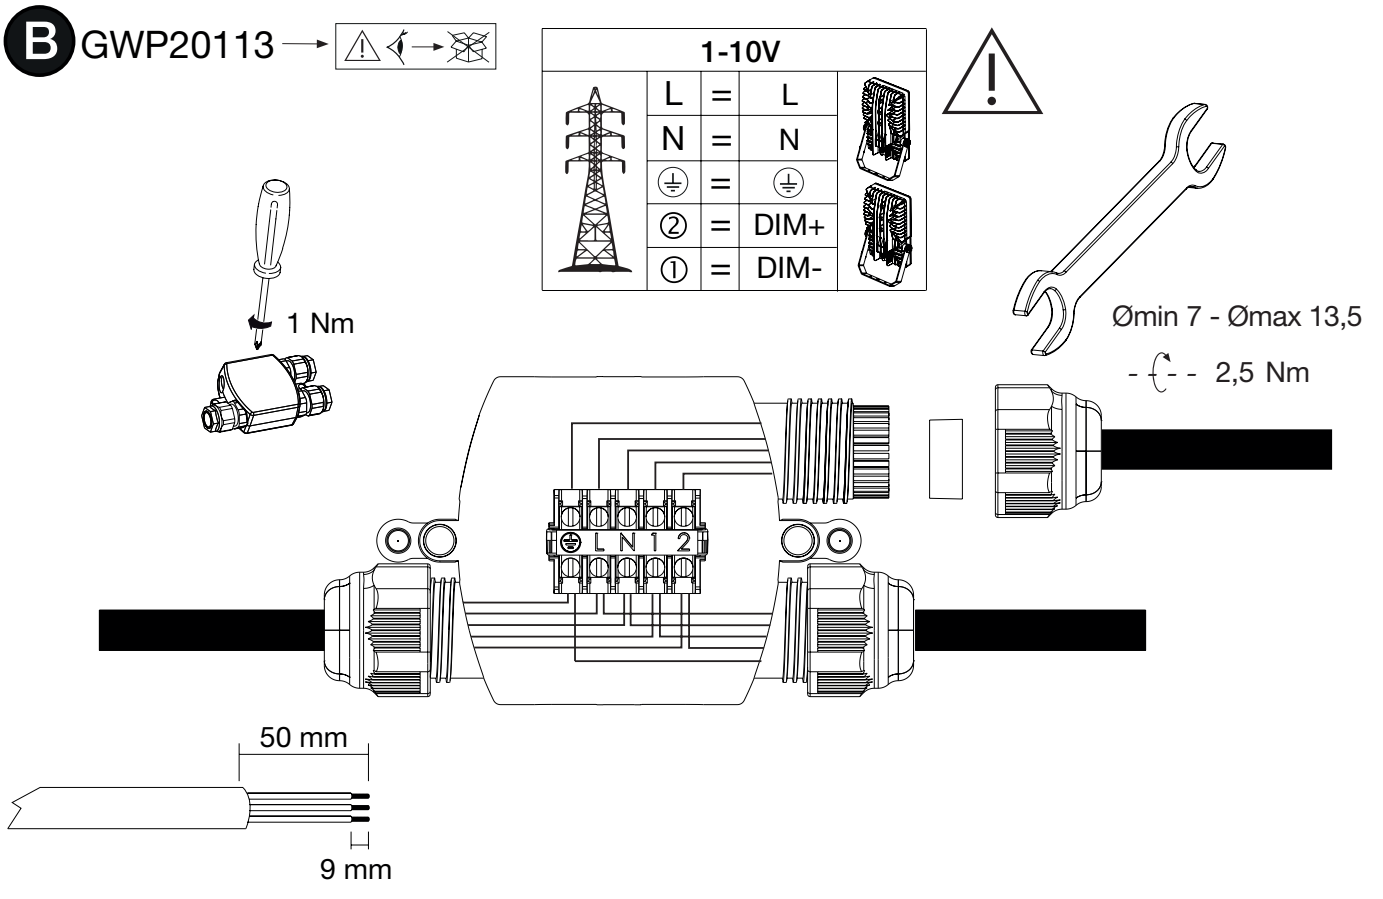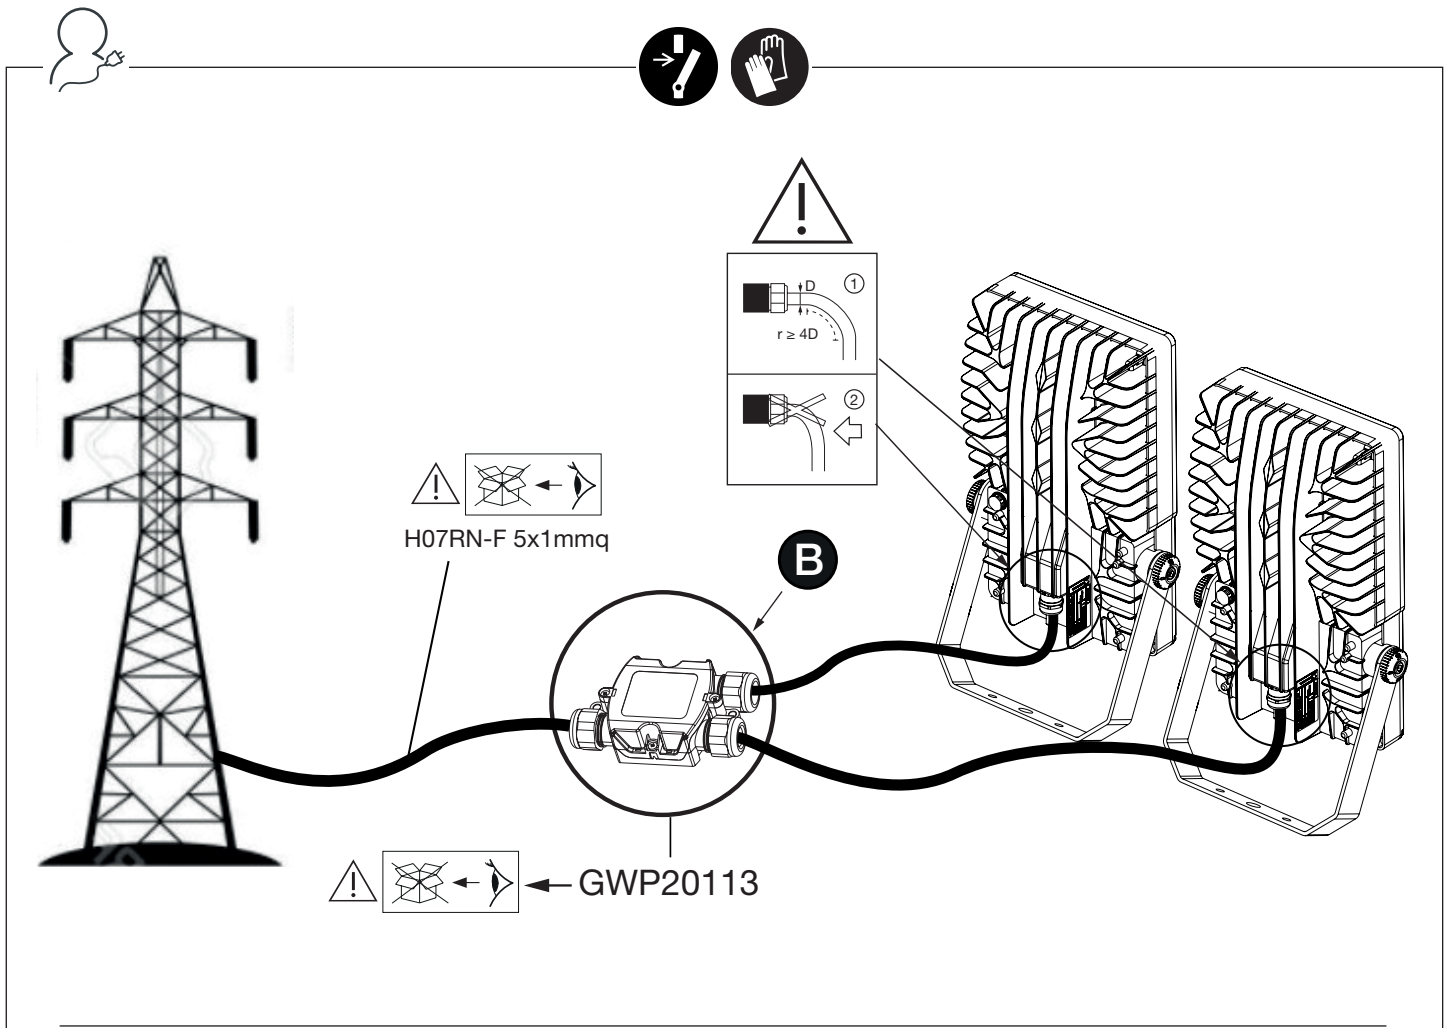


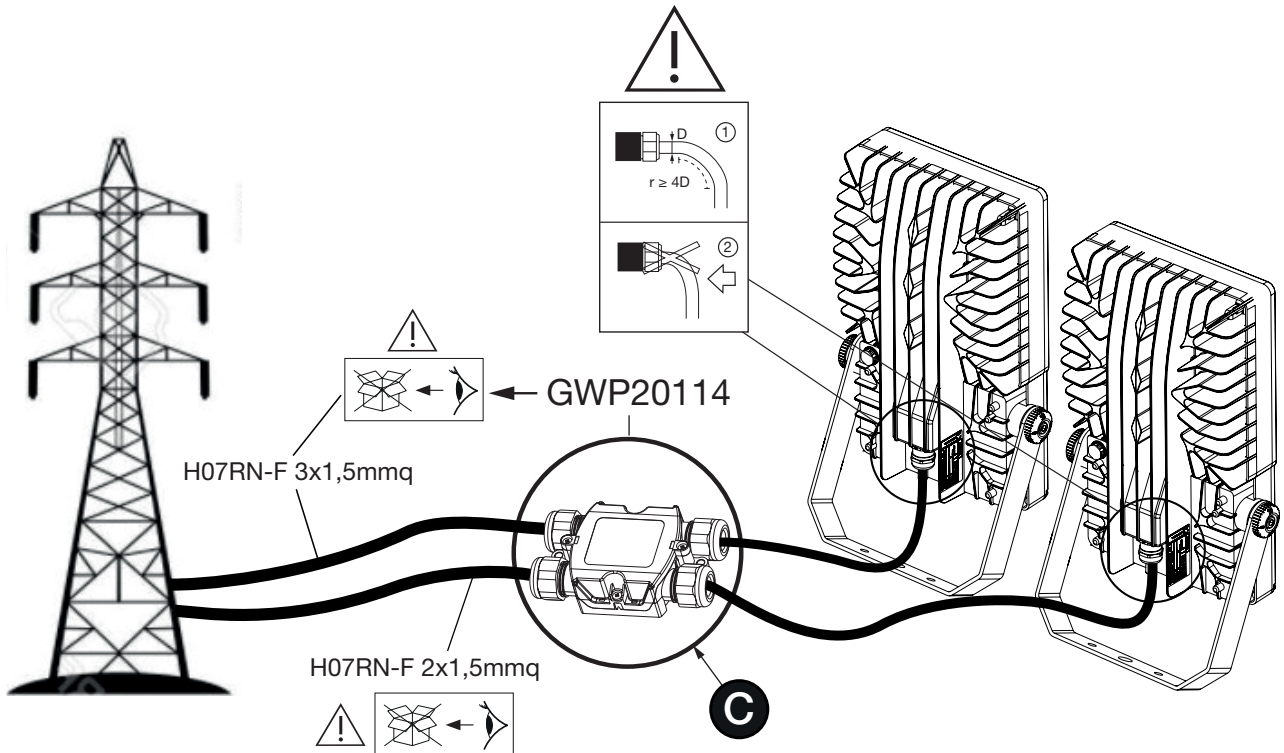




Ⓢ GWP20114 → ⚠









2,5 Nm
 $\varnothing_{\min} 7 - \varnothing_{\max} 13,5$





1-10V			
	L =	L	
	N =	N	
	⊕ =	⊕	
	② =	DIM+	
	① =	DIM-	

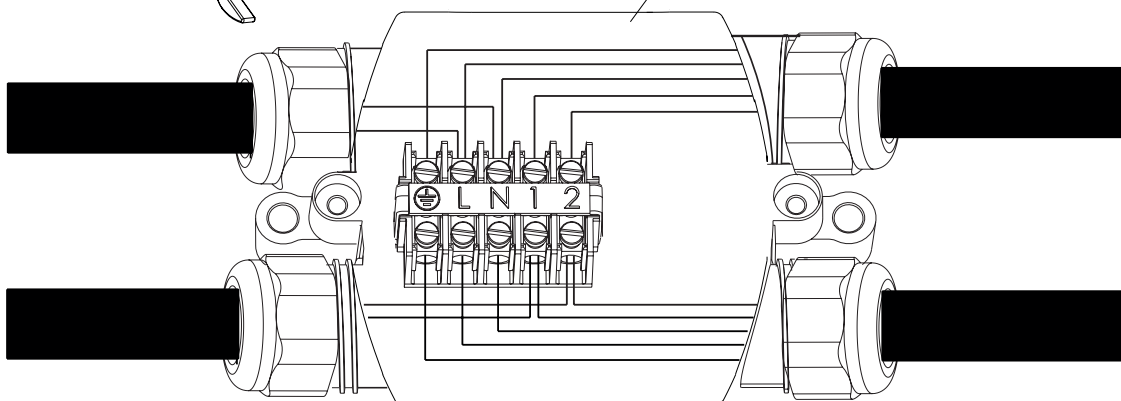


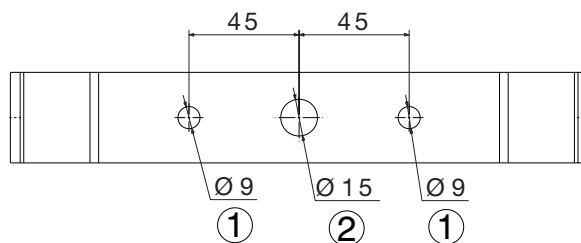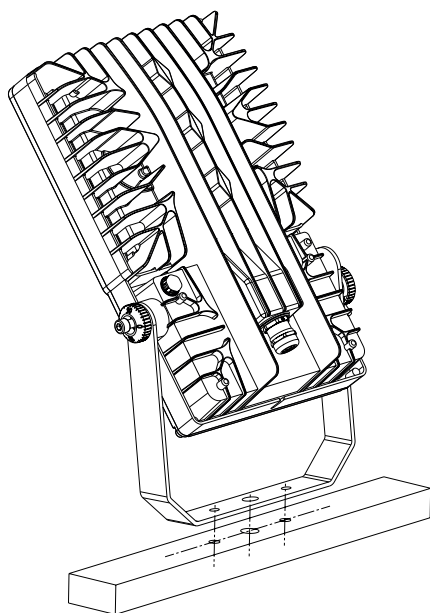


- | | | |
|---|--|---------|
| ① | | M8 |
| | | DIN7980 |
| ② | | M14 |
| | | DIN7980 |

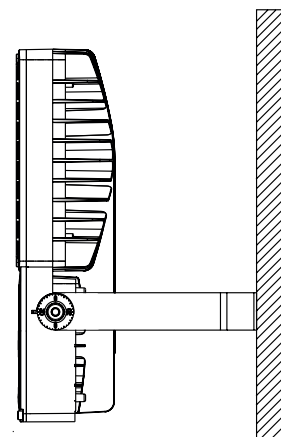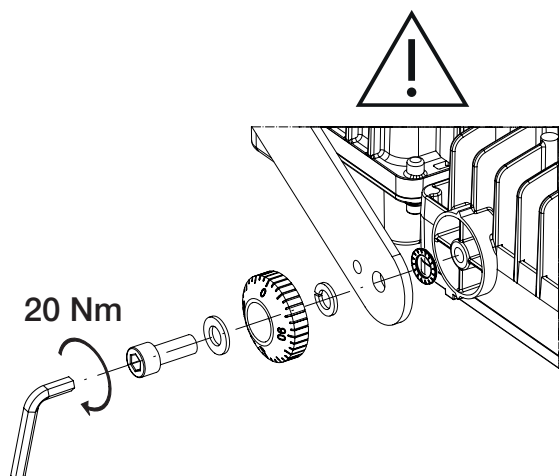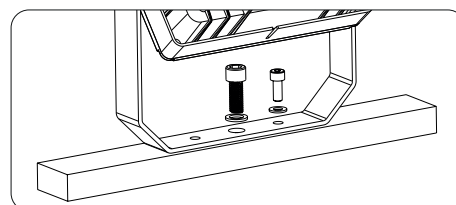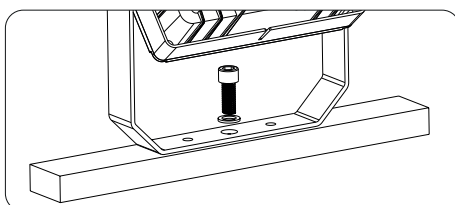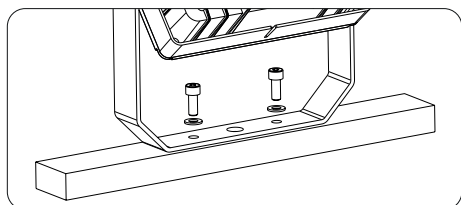

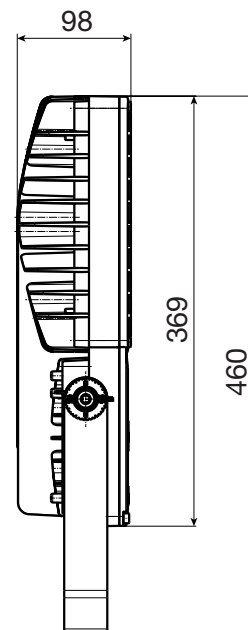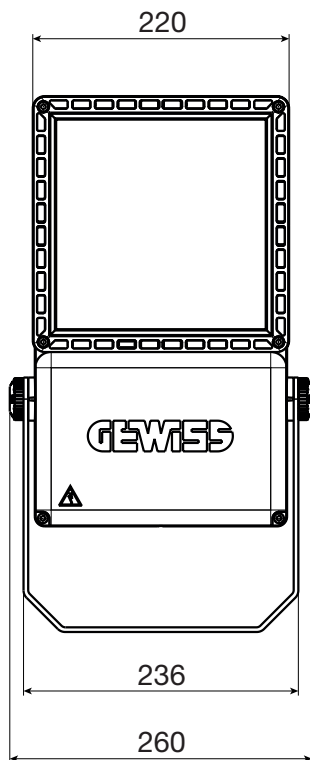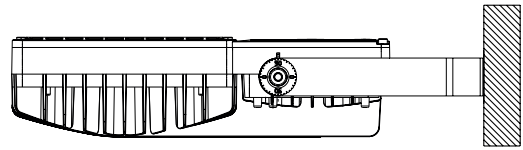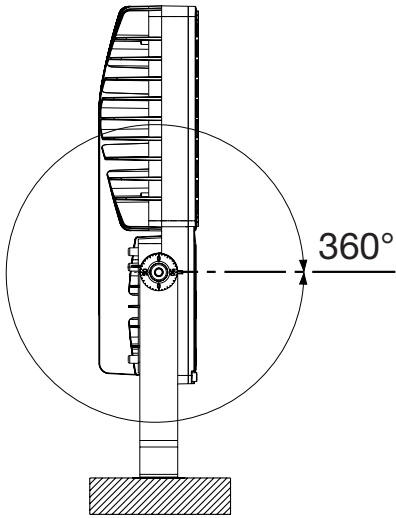


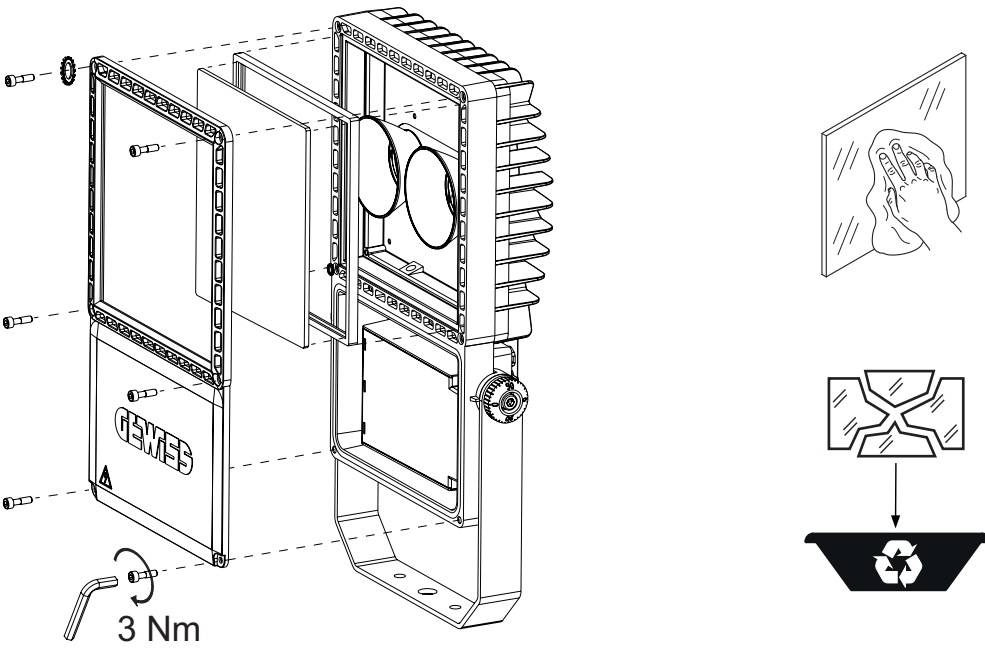

	OPTICS				
	SN	SW	SM	ASW	ALW
GWP20401	✓	✓	✓		
GWP20403				✓	✓

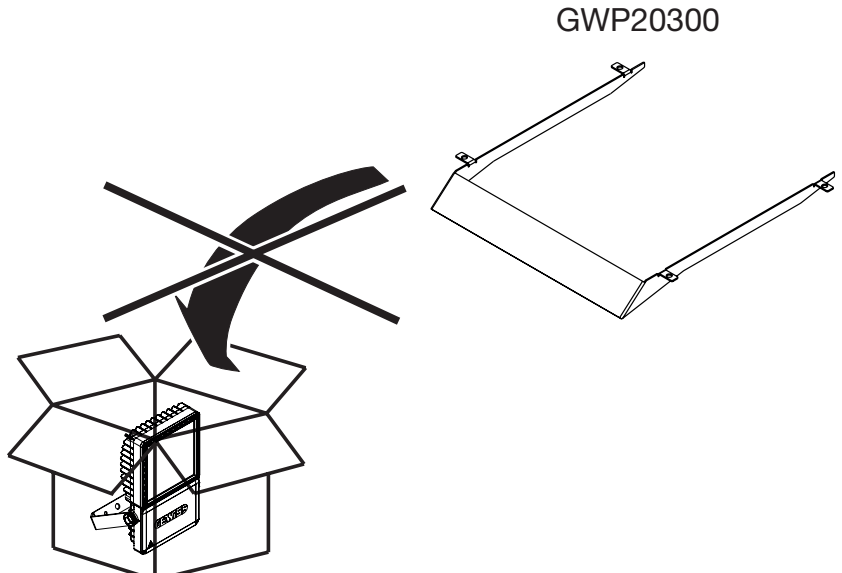

GWP20300

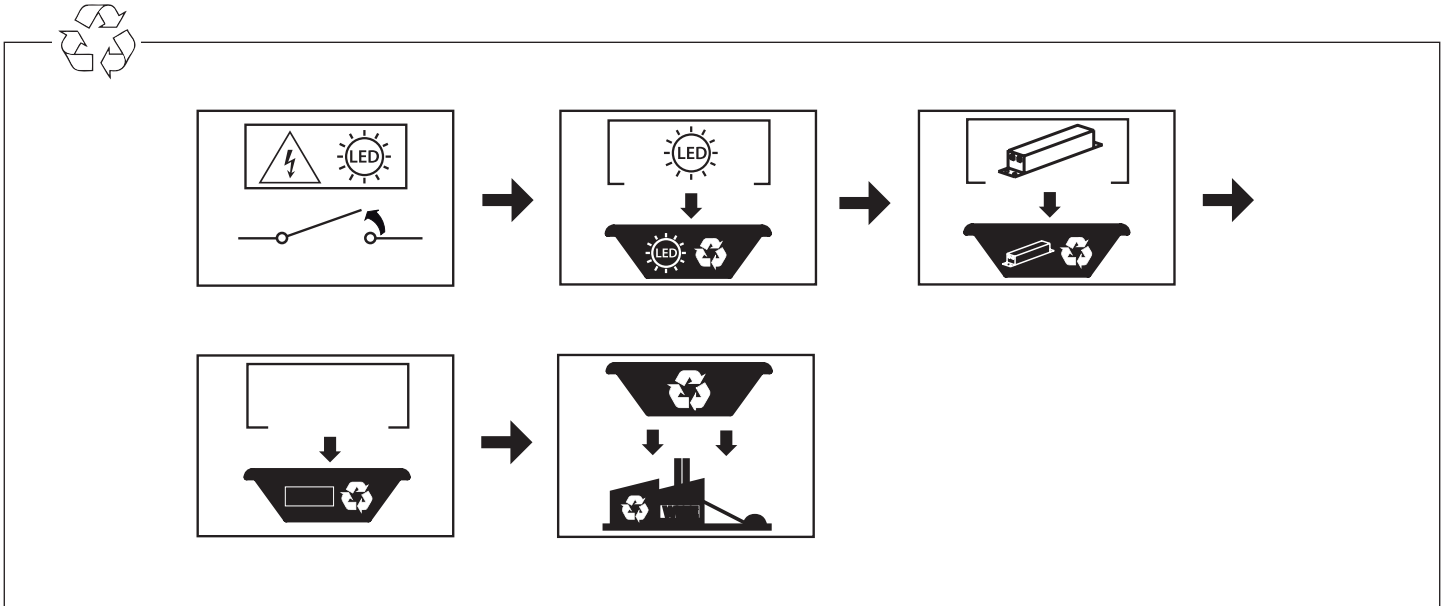

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:
GEWISS S.p.A. Via D.Bosatelli, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com

According to applicable UK regulations, the company responsible for placing the goods in UK market is:
GEWISS UK LTD - Unity House, Compass Point Business Park, 9 Stocks Bridge Way, ST IVES
Cambridgeshire, PE27 5JL, United Kingdom tel: +44 1954 712757 E-mail: gewiss-uk@gewiss.com



+39 035 946 111
8:30 - 12:30 / 14:00 - 18:00
lunedì - venerdì / monday - friday



www.gewiss.com

