




A range of tabletop panels, wall boxes and self-supporting wall enclosures suitable for housing ChorusSmart modular devices. Wall boxes and panels, available in black and white, must be completed with ChorusSmart support and One plates. The self-supporting enclosures, available in grey RAL 7035, are characterised in IP40 and IP55 versions: both have pre-cut knockouts, and the watertight version is also provided with a door with a transparent UV membrane. Self-supporting boxes and enclosures are designed to be fitted with an earth terminal.

| | | | |
|---------------------------|------------------------------|--------------------------------|------------------|
| Description | 3 modules | Colour | Grey RAL 7035 |
| No. knockout holes Ø23 | 3 on sides / 1 on the bottom | N. holes Ø 23 with cable gland | 1 |
| Type of knockout holes | Removable with tool | IP degree | IP40 |
| Insulation class | II | Mechanical resistance | IK07 |
| Lid screws | Corrosion-resistant steel | Torque screws tightening | 0.8 Newton/meter |
| Outer dim. LxHxD (mm) | 99x82x56 | Glow wire test | 650 °C |
| Thermo-pressure with ball | 70 °C | Standard | EN 60670-1 |
| Installation temperature | -25 +60 °C | Electrocod | 0212 |

DIMENSIONAL

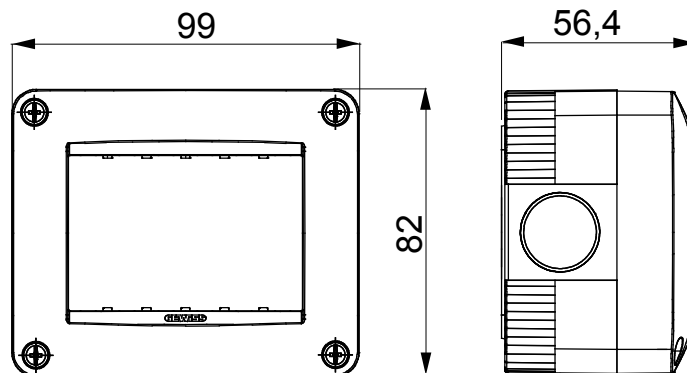

TECHNICAL SYMBOLOGY



IP

IP40




IK

IK07

GWT

650 °C



70 °C

STANDARDS/APPROVALS

