


Flush-mounting roller shutter touch module. Device for commanding the motor that drives roller shutters, curtains, Venetian blinds, roller blinds, etc. via 2 interlocked output contacts with potential. There are two frontal touch areas for upward (UP) and downward (DOWN) movement, and for regulating the tilt of the slats. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol. The device has n°3 DIP-switches, located on the back of the device, for feature configuration.

Description	Touch roller-shutter module	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	No. input channels	2
Local control	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Stocking temperature	-25 ÷ +70 °C	No. output channels	2
Working temperature	-5 ÷ +45 °C	Output contacts	n. 2 x 2,3 A cosφ 0,6
Relative humidity (non-condensative)	Max 93%	240 V ac Incandescent-halogen lamps	-
Front light signaling	Blue led	240 V ac LED lamps	-
Wiring terminals	With screw	Loads piloted from electronic transf. 240 V ac	-
Terminal tightening capacity stranded cables (mm <sup>2</sup> )	Max. 1,5	240 V Fluorescent lamps	-
Terminal tightening capacity solid cables (mm <sup>2</sup> )	Max. 1,5	Load control	-
Context	Dry indoor places	Acoustic signalling element	Buzzer
IP degree	IP20 (with plate fitted)	Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

### DIMENSIONAL

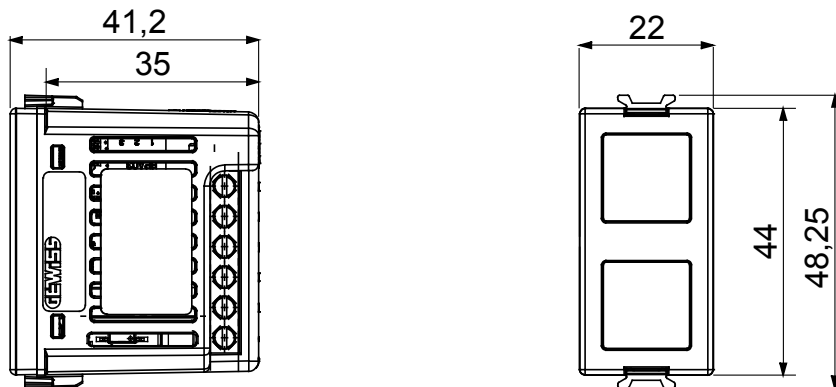

### TECHNICAL SYMBOLOGY

**IP**

IP20 (with plate fitted)

### STANDARDS/APPROVALS

