



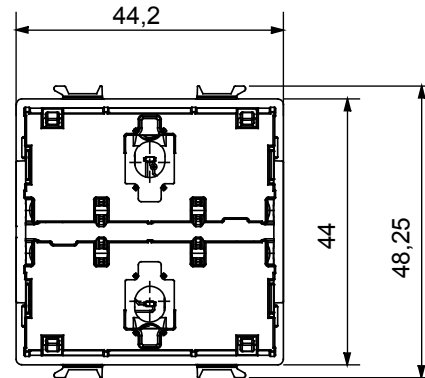

Flush-mounting axial dimmer module. Two axial push-buttons on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press). The device must be completed with one of the front buttons key available. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

| | | | |
|---|--|--|---------------------------|
| Description | Axial dimmer module | Power supply | 100 ÷ 240 V ac - 50/60 Hz |
| No. modules | 2 | No. input channels | 2 |
| Local control | Via 2 front push buttons (to complete with button key) | Auxiliary input channel voltage | 100 ÷ 240 V ac - 50/60 Hz |
| Stocking temperature | -25 ÷ +70 °C | N. of LED input channels | - |
| Working temperature | -5 ÷ +45 °C | LED input channels voltage | - |
| Relative humidity (non-condensative) | Max 93% | No. output channels | 1 |
| Front light signaling | Blue led | Output contacts | - |
| Wiring terminals | With screw | 240 V ac Incandescent-halogen lamps | 4-150 W |
| Terminal tightening capacity stranded cables (mm ²) | Max. 1,5 | 240 V ac LED lamps | 4-150W (max 10 lamps) |
| Terminal tightening capacity solid cables (mm ²) | Max. 1,5 | Loads piloted from electronic transf. 240 V ac | 4 ÷ 150 VA (240 V ac) |
| Context | Dry indoor places | 240 V Fluorescent lamps | - |
| IP degree | IP20 (with button key) | Load control | Trailing edge |
| Standard | 2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000 | | |

DIMENSIONAL

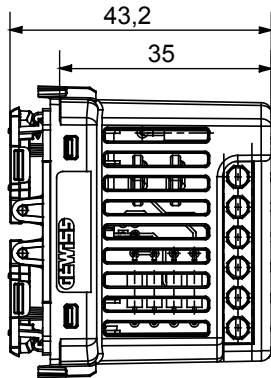

TECHNICAL SYMBOLOGY

IP

IP20 (with button key)

STANDARDS/APPROVALS

