




Flush-mounting touch switch module. Two touch areas on the front for switching an ON/OFF load (bistable/momentary function) or a timed ON load via an output contact with potential. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

| | | | |
|---|--|--|--|
| Description | Touch one-way switch | Power supply | 100 ÷ 240 V ac - 50/60 Hz |
| No. modules | 1 | No. input channels | 2 |
| Local control | Via 2 frontal touch areas (must be completed with ICE Touch plate) | Auxiliary input channel voltage | 100 ÷ 240 V ac - 50/60 Hz |
| Stocking temperature | -25 ÷ +70 °C | No. output channels | 1 |
| Working temperature | -5 ÷ +45 °C | Output contacts | 1 NO 5A (AC1) 240 V ac |
| Relative humidity (non-condensative) | Max 93% | 240 V ac Incandescent-halogen lamps | Max 1000 W |
| Front light signaling | Blue led | 240 V ac LED lamps | Max 100 W (max 5 lamps) |
| Wiring terminals | With screw | Loads piloted from electronic transf. 240 V ac | Max 250 VA |
| Terminal tightening capacity stranded cables (mm ²) | Max. 1,5 | 240 V Fluorescent lamps | Max 120 W (max 6 lamps) |
| Terminal tightening capacity solid cables (mm ²) | Max. 1,5 | Load control | - |
| Context | Dry indoor places | Acoustic signalling element | Buzzer |
| IP degree | IP20 (with plate fitted) | Standard | 2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000 |

DIMENSIONAL

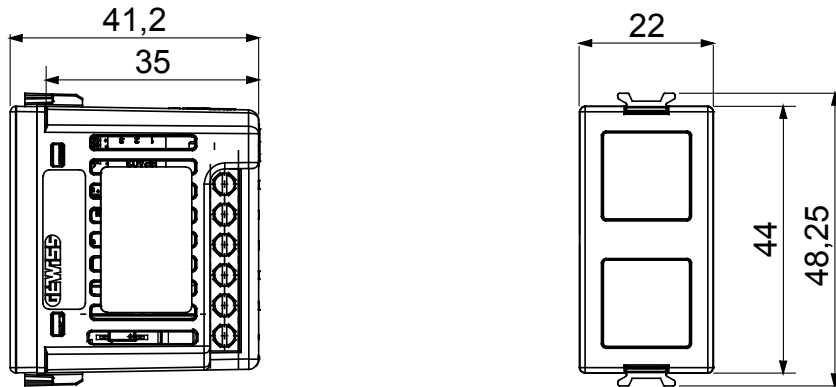

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

