



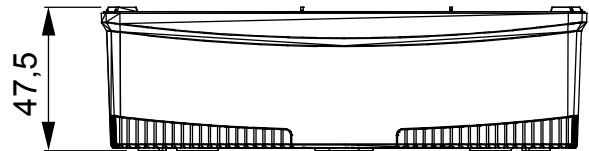

A range of tabletop panels, wall boxes and self-supporting wall enclosures suitable for housing ChorusSmart modular devices. Wall boxes and panels, available in black and white, must be completed with ChorusSmart support and One plates. The self-supporting enclosures, available in grey RAL 7035, are characterised in IP40 and IP55 versions: both have pre-cut knockouts, and the watertight version is also provided with a door with a transparent UV membrane. Self-supporting boxes and enclosures are designed to be fitted with an earth terminal.

| | | | |
|--------------------------|------------------|---------------------------|-------------------|
| Description | 2+2 modules | Type | Vertical |
| Colour | Satin White | Characteristics | Halogen free |
| Support | GW16822 | Suitable for plates | ONE International |
| Torque screws tightening | 0.8 Newton/meter | Outer dim. LxHxD (mm) | 90x161x46 |
| Glow wire test | 650 °C | Thermo-pressure with ball | 70 °C |
| Standard | EN 60670-1 | Installation temperature | -5 +60 °C |
| Electrocod | 0110 | | |

DIMENSIONAL

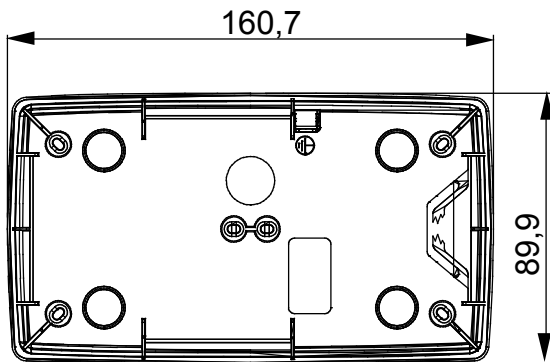

TECHNICAL SYMBOLOGY




GWT

650 °C



70 °C

INSTALLATION



STANDARDS/APPROVALS

