



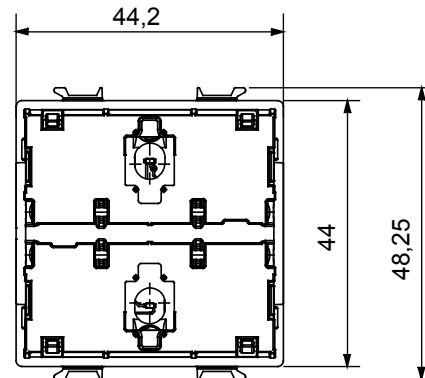

Flush-mounting axial auxiliary module with two commands. Two axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the front buttons key available.

|  |  |   |  |
|--|--|---|--|
| Description  | 2-channel auxiliary axial control                      | Output contacts   | n. 2 x 1A (AC1)  |
| Power supply   | 100 ÷ 240 V ac - 50/60 Hz                              | No. modules   | 2  |
| No. output channels  | 2  | Standard  | 2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000 |
| Working temperature  | -5 ÷ +45 °C  | Relative humidity (non-condensative)                            | Max 93%  |
| Wiring terminals   | With screw   | Terminal tightening capacity stranded cables (mm <sup>2</sup> ) | Max. 1,5   |
| Terminal tightening capacity solid cables (mm <sup>2</sup> ) | Max. 1,5   | Category  | 2-channel auxiliary axial control  |
| No. input channels   | -  | IP degree   | IP20 (with button key)   |
| 240 V ac Incandescent-halogen lamps                          | -  | 240 V ac LED lamps  | -  |
| Loads piloted from electronic transf. 240 V ac               | -  | LED colour  | Blue   |
| Local control  | Via 2 front push buttons (to complete with button key) | Load control  | -  |
| Material   | Technopolymer  |   |  |

### DIMENSIONAL

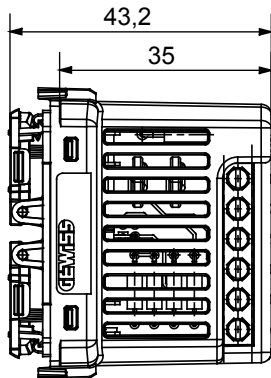

### TECHNICAL SYMBOLOGY

**IP**

IP20 (with button key)

### STANDARDS/APPROVALS

