

Product Data Sheet


GW66682

IB Range



For walls	Masonry	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP44
Mechanical resistance	IK08	Houseable IB socket-outlets	16/32 A
For socket-outlets	CBF horizontal	Electrocod	2220
Drilling bottom	Through multidiameter cutter	Minimum installation temperature	-15°C

DIMENSIONAL

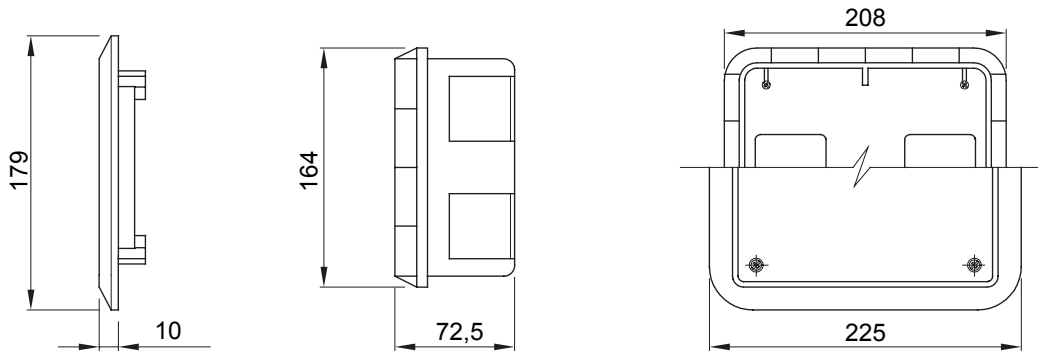

TECHNICAL SYMBOLOGY

GWT

650 °C

IP

IP44

IK

IK08

STANDARDS/APPROVALS

