


# Product Data Sheet


## GW66696

IB Range



IP degree	IP66	Mechanical resistance	> IK10
Houseable interloc. socket	1	Houseable IB socket-outlets	16/32 A SELV
Side entries	2xØ 23	Top entries	2xØ 23/29
Bottom entries	-	Glow Wire Test	850 °C
Suitable for	Heavy duty	Electrocod	2222
Impact resistance at -20 °C	20 J		

### DIMENSIONAL

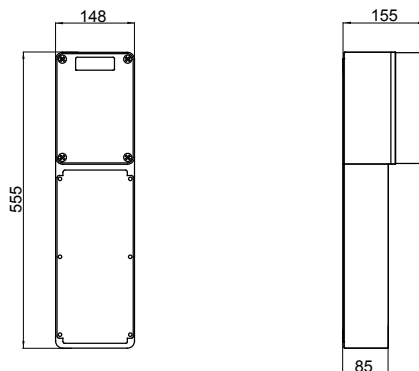

### TECHNICAL SYMBOLOGY

**IP**

**IK**

**GWT**

IP66

> IK10

850 °C

### STANDARDS/APPROVALS

