


# Product Data Sheet



## GW66741N

IB Range



Top entries	2xØ 23	Glow Wire Test	650 °C
IP degree	IP67	Mechanical resistance	IK08
Bottom entries	1xØ 29/37	Electrocod	2222
Houseable IB socket-outlets	N. 1 IEC 309 16-32A IP44/67 + N.1 16A MAX 3P+E or GW27401/GW27403		Minimum installation temperature -25°C

### DIMENSIONAL

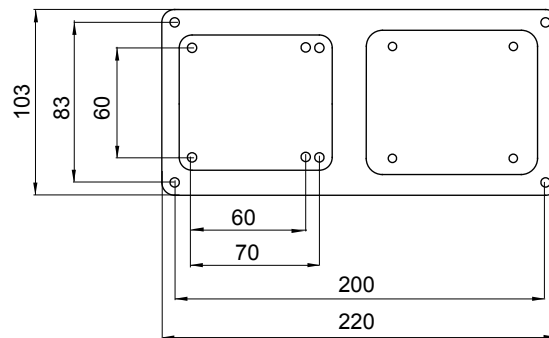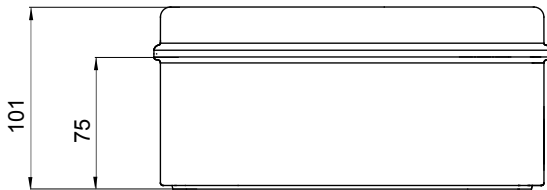

### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**IP**

IP67

**IK**

IK08

### STANDARDS/APPROVALS

