

Product Data Sheet

DX26725W


RK Range



Light rigid conduits RK9 HF range, made of PP, classification 23431, available in four diameters, from 16 to 32 mm, 3-metre long in white RAL 9010. Halogen free according to the Standard EN 50642. Suitable for electrical and/or data transmission systems in the tertiary and offices, where aesthetic is a plus. They can be integrated with spiralled sheaths and wall mounting enclosures. Completing the offer, a wide range of accessories and routing components from IP40 to IP67 protection rating. The RK9 HF conduits comply with Product Standard EN 61386-1 and EN 61386-21.

| | | | |
|---|---|---|--|
| Colour | White RAL 9010 | Material | PP HF |
| Length (m) | 3 | Conduits Ø (mm) | 25 |
| Glow Wire Test | 960 °C | Type of material | Halogen free in compliance with EN 50642 |
| Resistance to compression | 2 (Light - 320 N) | Resistance to impact | 3 (Medium - 2 J) |
| Resistance to bending | 1 (Rigid) | Electrical characteristics | 2 (With electrical insulating characteristics) |
| Protection against ingress of solid objects without accessories | 0 | Protection against ingress of water objects without accessories | 0 |
| Resistance against corrosion | Not applicable to plastic conduit systems | Fire resistance | 1 (Non-flame propagating) |
| Protection against ingress of solid objects with accessories | 4/6 (It depends on the accessories used) | Protection against ingress of water with accessories | 0/5/7 (It depends on the accessories used) |
| Halogen Free | Yes, according to EN 50642 | Standard | EN 61386-1 EN 61386-21 |
| Classification | 23431 | | |

DIMENSIONAL

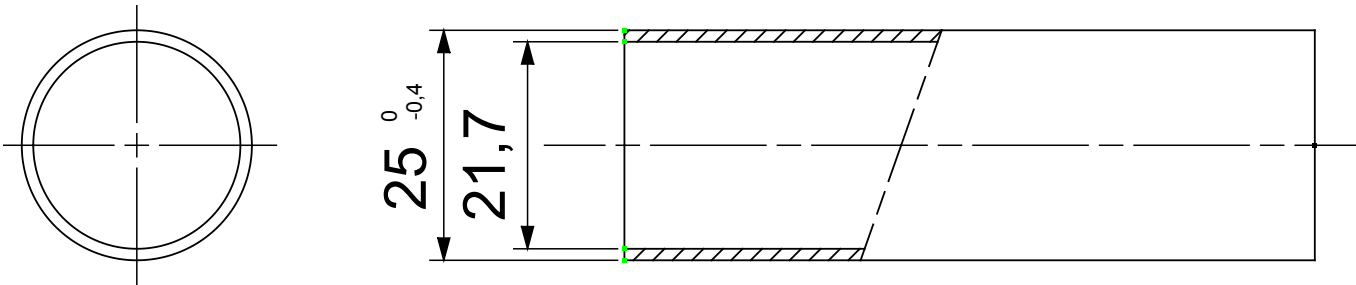

TECHNICAL SYMBOLOGY

GWT

HF
HALOGEN FREE

320N

2J

HF
HALOGEN FREE

960 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 04/07/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice