

Product Data Sheet

DX26732W


RK Range



Light rigid conduits RK9 HF range, made of PP, classification 23431, available in four diameters, from 16 to 32 mm, 3-metre long in white RAL 9010. Halogen free according to the Standard EN 50642. Suitable for electrical and/or data transmission systems in the tertiary and offices, where aesthetic is a plus. They can be integrated with spiralled sheaths and wall mounting enclosures. Completing the offer, a wide range of accessories and routing components from IP40 to IP67 protection rating. The RK9 HF conduits comply with Product Standard EN 61386-1 and EN 61386-21.

Colour	White RAL 9010	Material	PP HF
Length (m)	3	Conduits Ø (mm)	32
Glow Wire Test	960 °C	Type of material	Halogen free in compliance with EN 50642
Resistance to compression	2 (Light - 320 N)	Resistance to impact	3 (Medium - 2 J)
Resistance to bending	1 (Rigid)	Electrical characteristics	2 (With electrical insulating characteristics)
Protection against ingress of solid objects without accessories	0	Protection against ingress of water objects without accessories	0
Resistance against corrosion	Not applicable to plastic conduit systems	Fire resistance	1 (Non-flame propagating)
Protection against ingress of solid objects with accessories	4/6 (It depends on the accessories used)	Protection against ingress of water with accessories	0/5/7 (It depends on the accessories used)
Halogen Free	Yes, according to EN 50642	Standard	EN 61386-1 EN 61386-21
Classification	23431		

DIMENSIONAL

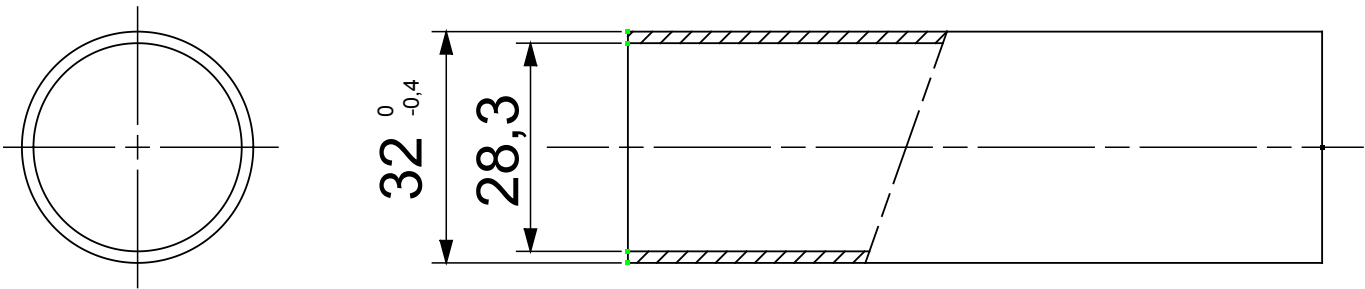

TECHNICAL SYMBOLOGY

GWT

HF
HALOGEN FREE

320N

1
2J

HF
HALOGEN FREE

960 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 04/07/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice