




I-FAST products are JOINON's DC fast-charging solutions ideal for charging all types of electric vehicles equipped with high-voltage systems in private or public high-rotation parking lots, highways and service areas. The offer consists of wallboxes up to 30 kW and stations up to 180 kW. They feature an elegant design and finishes that make them an urban and extra-urban furnishing product, with a graphic display for a better User Experience and use of services for the EV Driver user.

Power specification - AC input		Environmental	
Input voltage	3 Φ 380 ÷ 415 Vac	Operating temperature	-30°C ÷ +50 °C
AC input connection	3P+N+PE (Wye configuration), TN/TT	Humidity	5% ÷ 95% RH, Non-Condensing
Max input current	3 Φ 217A	Altitude	≤ 2.000 m
Frequency	50 Hz / 60 Hz	IP degree	IP55
Power factor	> 0.99	Mechanical resistance	IK10 (not including screen & RFID module)
Efficiency	>94%	Cooling method	Fan cooling
Power specification - DC output		Mechanical	
Output voltage range	CCS2: 150 ÷ 950 Vdc	Dimension	800 mm x 650 mm x 1.900 mm
Max output current	CCS2: 200A (peak at 250A)	Weight	≤460 kg
Maximum output power	150 kW	Cable length	4.5 m
Voltage/Current accuracy	±2%	Protection	
User interface & control		Input protection	
Display	7" graphic	Output protection	
Push buttons	Operation Buttons / Emergency Stop Button	Regulation	
User Authentication	OCPP 1.6 JSON, QR Code, App	Accessibility	
Meter	DC PTB Meter	Safety	
Communication		Certificate	
External	Ethernet, Wi-Fi and 4G	Charging interface	
Internal	CAN bus / RS485	National	
Contactless Solution			
Payment terminal	Yes, Payter P66		

## DIMENSIONAL

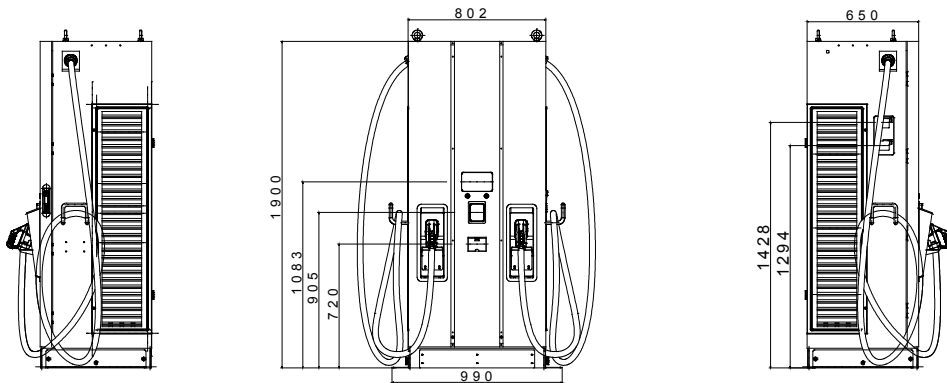

## TECHNICAL SYMBOLOGY

IP

IK

IP55

IK10 (not including screen & RFID module)

## STANDARDS/APPROVALS

