




Support for fixing modular devices of the ChoruSmart residential series, made of technopolymer with ribenhanced structure that guarantees high performance. Suitable for flush-mount or wall-mount boxes, equipped with screw fixing systems.  
The convenient front coupling/disconnect system of ChoruSmart modular devices also allows you to house modular devices with 1/2, 1, 2 and 3 modules.

Description	3 modules	Caractéristiques	Sans halogène
Fixation	2 vis (incluses)	Pour boîte	3 modules
Test du fil incandescent	650 °C	Thermopression avec bille	70 °C
Norme	EN 60669-1	Compatibilité	Pour plaque EGO SMART (également compatible avec les plaques EGO et ChoruSmart)
Electrocod	0121		

### DIMENSIONS

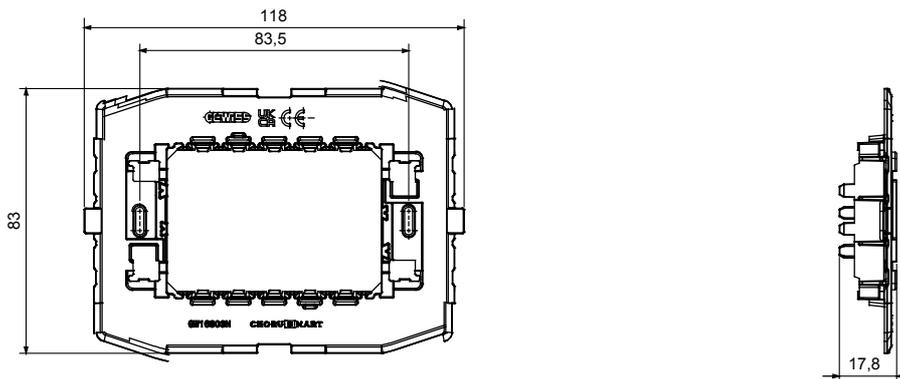


### SYMBOLE TECHNIQUE



GWT

650 °C



70 °C

### NORMES ET HOMOLOGATIONS

