




Support for fixing modular devices of the ChoruSmart residential series, made of technopolymer with ribenhanced structure that guarantees high performance.
Suitable for flush-mount or wall-mount boxes, equipped with screw fixing systems.
The convenient front coupling/disconnect system of ChoruSmart modular devices also allows you to house modular devices with 1/2, 1 and 2 modules.

| | | | |
|--------------------------|-------------------------|---------------------------|---|
| Description | 1 poste (2 modules) | Caractéristiques | Sans halogène |
| Fixation | Avec griffes (incluses) | Pour boîte | Rond (unique) |
| Test du fil incandescent | 650 °C | Thermopression avec bille | 70 °C |
| Norme | EN 60669-1 | Compatibilité | Pour plaque EGO SMART (également compatible avec les plaques EGO et ChoruSmart) |
| Electrocod | 0122 | | |

DIMENSIONS

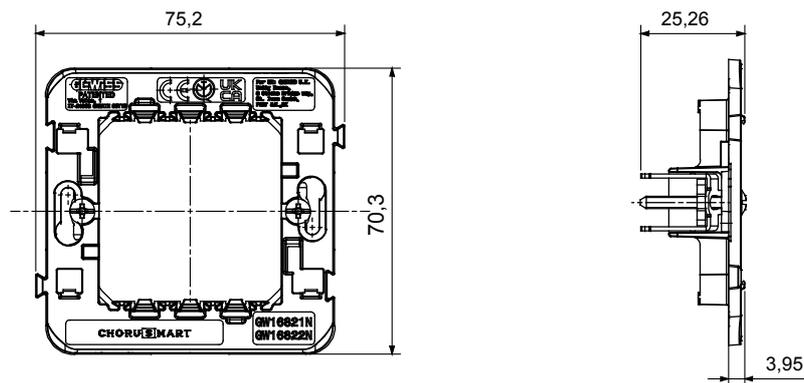


SYMBOLE TECHNIQUE



GWT

650 °C



70 °C

NORMES ET HOMOLOGATIONS

