




Support for fixing modular devices of the ChoruSmart residential series, made of technopolymer with ribenhanced structure that guarantees high performance.  
Suitable for flush-mount or wall-mount boxes, equipped with screw fixing systems.  
The convenient front coupling/disconnect system of ChoruSmart modular devices also allows you to house modular devices with 1/2, 1 and 2 modules.

Description	1 poste (2 modules)	Caractéristiques	Sans halogène
Fixation	À vis (vis non incluses)	Pour boîte	Rond / Carré (unique ou horizontal)
Test du fil incandescent	650 °C	Thermopression avec bille	70 °C
Norme	EN 60669-1	Compatibilité	Pour plaque EGO SMART (également compatible avec les plaques EGO et ChoruSmart)
Electrocod	0122		

### DIMENSIONS

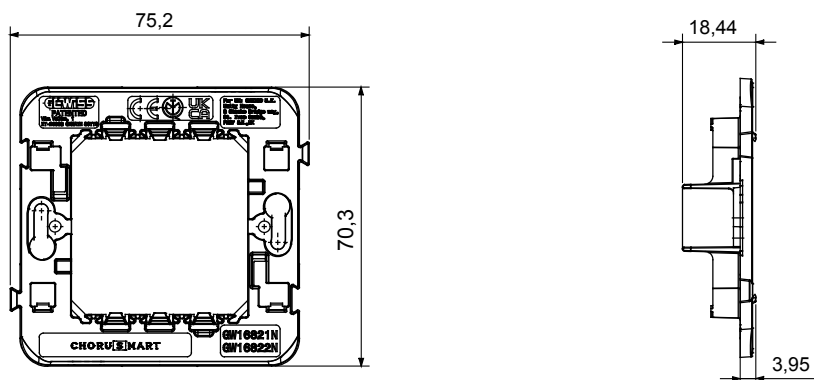

### SYMBOLE TECHNIQUE



GWT

650 °C



70 °C

### NORMES ET HOMOLOGATIONS

