



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Toepassing	Binnen / Buiten	Versie	Emergency
Voltage	220 - 240 V - 50/60 Hz	Isolatie klasse	I
Kleur	Grafietgrijs	IP graad	IP55
Mechanische weerstand	IK09	Gloeidraadtest	850 °C
Minimale afstand vanaf het verlichte object	1 m	Bedrijfstemperatuur	-25 +25 °C
Efficiëntieklasse van passende lampen	A	Lamp vermogen	26-32 W
Type stuurprogramma	EVG elektronische reactor	Lamp houder	GX24q-3
Lamp	FSM	Autonomie	1 h
Accumulator type	Nikkel-cadmium	Lichtstroom in nood [lm]	135 / 90
Gewicht (kg)	2.8	Electrocod	2415

### DIMENSIONAL

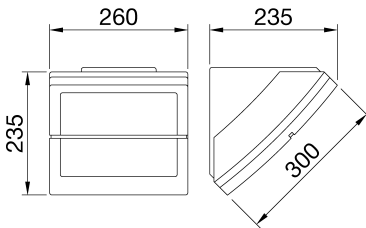

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK09

**GWT**  
850 °C



### STANDARDS/APPROVALS

