



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Toepassing	Binnen / Buiten	Versie	LED
Voltage	220/240 V - 50/60 Hz - Stand-alone	Isolatie klasse	I
Kleur	Grafietgrijs	IP waarde	IP55
Mechanische weerstand	IK09	Gloeidraadtest	850 °C
Minimale afstand vanaf het verlichte object	1 m	Bedrijfstemperatuur	-25 +25 °C
Lamp houder	LED	Nominale flux (lm)	1200
Lamp	LED	Systeem vermogen	13 W
Kleur temperatuur	4000 K (CRI 90)	Lumen output (lm)	1000
Efficiëntieklasse van geïntegreerde leds	A ÷ A++	Soort lichtbron	Led - niet vervangbaar
Gewicht (kg)	2	Garantie	Kan verlengd worden
Electrocod	2424	Levensduur led (L70B50)	50000 h

### DIMENSIONAL

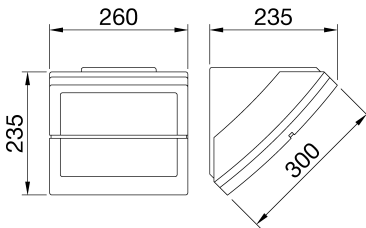

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK09

**GWT**  
850 °C



### STANDARDS/APPROVALS

