





Protected and compact waterproof ceiling or wall lamp, entirely made of polycarbonate. It is characterized by high mechanical resistance to shocks and high degree of impact of electrical safety with double possibility of entry for feeding, in the lower or lateral part of the ceiling light.

Toepassing	Binnen / Buiten	IP graad	IP44
Mechanische weerstand	IK10	Isolatie klasse	II
Gloeidraadtest	850 °C	Gewicht (kg)	0.4
Kleur	Grijs RAL 7035	Lamp houder	E27
Efficiëntieklasse van passende lampen	D ÷ A+	Max. lamp vermogen	100 W
Electrocod	2415		

### DIMENSIONAL

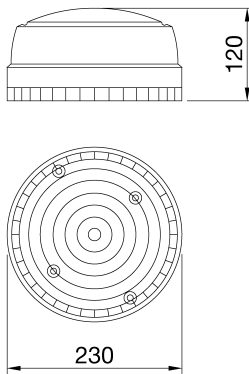

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



**IP**  
IP44

**IK**  
IK10



**GWT**  
850 °C

### STANDARDS/APPROVALS

