




Kit for emergency use equipped with Ni-Cd battery with 3h autonomy after 24h of recharge. Equipped with a test button to check the status of the battery, it must be positioned on the luminaire. Warranty 2 years, battery and inverter excluded. Compatible with the following ranges: ELIA AL, ELIA DL and ELIA PL. NOT COMPATIBLE with the ELIA PL IP65 range.

Omschrijving	Noodkit 3u	Serie	ELIA AL, ELIA DL, ELIA PL, ELIA PL BACKLIT, VISIO [16] - NIET COMPATIBEL MET ELIA PL IP65
Type	Noodkit	Versie	Permanent 3 u
Vermogen	4 W	Toepassing	Intern
Bedrijfstemperatuur	0 +25 °C	IP graad	IP20
Mechanische weerstand	IK03	Autonomie	3 h
Bevestiging	Apparaatrand	Isolatie klasse	II
Voeding batterijen	Vervangbaar	Voltage	220 - 240 V - 50/60 Hz
Laadtijd	24 u	Gewicht (kg)	0.8
Electrocod	2419		

## DIMENSIONAL

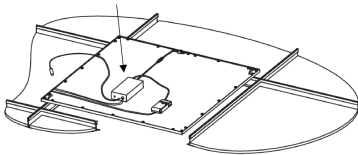

## PHOTOMETRIC DISTRIBUTION

## TECHNICAL SYMBOLOGY

**IP**      **IK**  
IP20      IK03



## STANDARDS/APPROVALS

