




Support for fixing modular devices of the ChoruSmart residential series, made of technopolymer with ribenhanced structure that guarantees high performance. Suitable for flush-mount or wall-mount boxes, equipped with screw fixing systems. The convenient front coupling/disconnect system of ChoruSmart modular devices also allows you to house modular devices with 1/2, 1 and 2 modules.

Descripción	2 módulos	Características	Libre de halógenos
Fijación	Tornillo (no incluidos)	Para caja	Redonda/cuadrada (en composición simple u horizontal)
Test del hilo incandescente	650 °C	Termopresión con bola	70 °C
Norma de referencia	EN 60669-1	Compatibilidad	Para placa EGO SMART (también compatible con placas EGO y otras placas ChoruSmart)
Código Electrocod	0122		

DIMENSIONAL

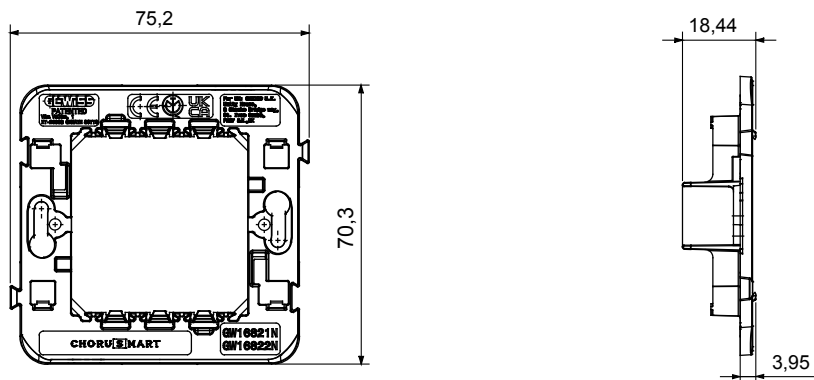

SIMBOLOGÍA TÉCNICA



GWT

650 °C



70 °C

MARCAS/APROBACIONES

