




A complete system of IP65 boards for distributing energy in tertiary, commercial sector and building applications, available both empty and pre-wired, in accordance with the international standard EN 61439-3 and EN 61439-4. The distribution boards allow to house flush-mounting and interlocked socket-outlets up to 63A and versions are available with 5, 10, 14 or 20 DIN modules and additional modules 14 and 20 DIN modules in order to increase modular space inside the boards. The switches can always be inspected thanks to the wide transparent door with ergonomic handle and "hinged" screws of the front of board facilitate the wiring and maintenance. Q-DIN are ideally for fixed applications: surface-mounting or pole-mounting, and transportable application: by handle and carrier. To ensure the best possible performance even in outdoor environments, prolonged exposure to the sun and bad weather, the boards are also UV resistant certified in compliance with EN62208.

Glow Wire Test	650 °C	Thermo-pressure with ball	80 °C
Dimensions LxH (mm)	132x71	IP degree	IP55
Mechanical resistance	IK08	For socket-outlets	Compact
Electrocod	2221	Suitable for	Boards GW66491/2/3, flush-mounting boxes GW66498 e enclosures base boxes GW44696

DIMENSIONAL

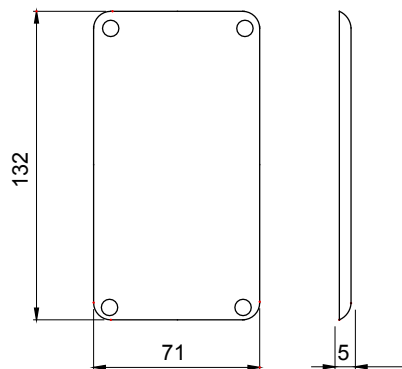

TECHNICAL SYMBOLOGY

GWT

650 °C



80 °C

IP

IP55

IK

IK08

STANDARDS/APPROVALS

