





The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.

Type	Q-BOX 4 ACS	board type	Wired
Colour	Light blue	Outer dim. LxHxD (mm)	636x821x400
Weight (kg)	22	Accordance with Standards	EN 61439-4 (ACS)
Characteristics	UV resistance (EN 62208)	IP degree	IP55
Mechanical resistance	IK10	Glow wire test	650 °C
Thermo-pressure with ball	70 °C	Insulation class	II
Power supply	Terminal block	No. of poles	3P+N+E
Power suppliable (kW)	33	Mains switch	MCB 63A 4P 6kA
MCB'S MT main RCCB	RCCB 63A 4P 0,03A - AC type	Circuits protection	MCB
No. socket outlets	5	Socket-outlet 2P+E 16A - IEC 309	2
Socket-outlet 2P+E 16A - IB	1	Socket-outlet 3P+E 16A - IB	1
Socket-out 3P+E 32A - IB	1	Emergency push-button	Yes

DIMENSIONAL

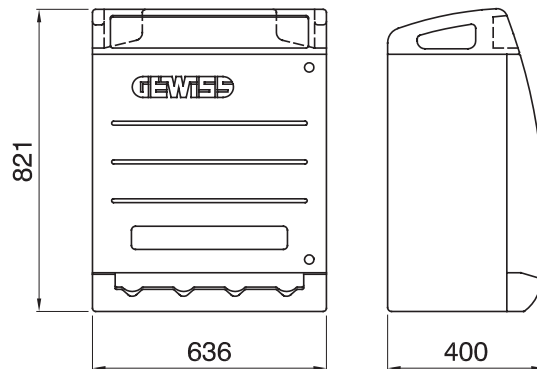


TECHNICAL SYMBOLOGY



IP
IP55

IK
IK10

GWT
650 °C



STANDARDS/APPROVALS

