




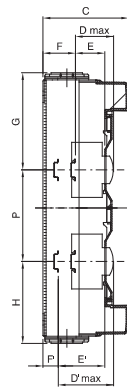

German standard wall mounting enclosure equipped with bipolar terminal blocks and two interchangeable flanges (2 flanges with knock-out elements).

Insulation class	II	Colour	Grey RAL 7035
Outer dim. LxHxD (mm)	298x420x140	IP degree	IP65
Installation	Wall mounting	Mechanical resistance	IK07
Door colour	Smoked Transparent	Terminal block N (mm <sup>2</sup> )	(3x25)+(10x10)
Terminal block T (mm <sup>2</sup> )	(3x25)+(10x10)	No. of modules EN 50022	24 (12X2)
Glow Wire Test	750 °C	Standard	IEC EN 60670-1; IEC EN 60670-24; DIN VDE 0603-1
Operating temperature	-25 +60 °C	Thermo-pressure with ball	70 °C
Pole 1 (mm <sup>2</sup> )	N (3x35) + (10x10)	Pole 2 (mm <sup>2</sup> )	E (3x35) + (10x10)

### DIMENSIONAL

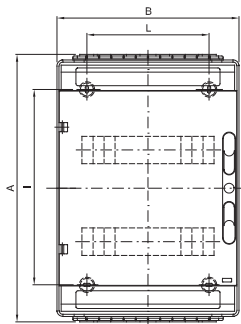

1	2	3	4
M16	M20	M25	M32

	Codice	A	B	C	B	E	F	G	H	P	D'max	E'	F'	NR	I	L
12M	GW 40 113 GW 40 123	278						126.5	151.5	/					161	
24M	GW 40 114 GW 40 124	438	298	140	75	48	48	156.5	131.5	150	102	75	21	4	320	200
36M	GW 40 115 GW 40 125	588						156.5	131.5	150					494	

### TECHNICAL SYMBOLOGY



II

**IP**

IP65

**IK**

IK07

**GWT**

750 °C



70 °C

### STANDARDS/APPROVALS

