





The widest range of flush-mounting switchboards and distribution boards available on the market today. Seven families designed to offer solutions in the residential and advanced tertiary sectors, also available in Halogen Free material. Versions from 2 to 72 modules, degrees of protection from IP40 to IP55 and specific versions also for plasterboard. Furthermore, the offer includes Multimedia Enclosures in compact (36 modules) and complete (54 modules) versions, both compliant with what is suggested by the CEI 306-2 guide.

class	II (לפי תקן) IEC 61140	צבע	שחור די
x גובהא מידות חיצוניות אורך (מ"מ) עומק	328x338x108	IP דרגה	IP40
התקנה	לוחות חשמל להתקנה מתחת לטיח	(W) ניתן להתפזרות הספק	25
זעזוע התנגדות	IK08	נקוב מתח	400 V
דלת צבע	שקוף מעושן	EN 50022 מס' מודולים	24+2 (12X2)
נקוב זרם	125 A	בדיקת תיל לוחט	650 °C
עבור קירות	לבנים	טמפרטורת הפעלה	-15' +60 °C
סוג חומר	EN 60754-2 נטול הלוגן בהתאם לתקן	לחץ תרמי עם כדור	70 °C
סטנדרט	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	בידוד מתח	750 V
ניתן להתקנה מרבית פסי צבירה	2 x 12 מודולים		

### DIMENSIONAL

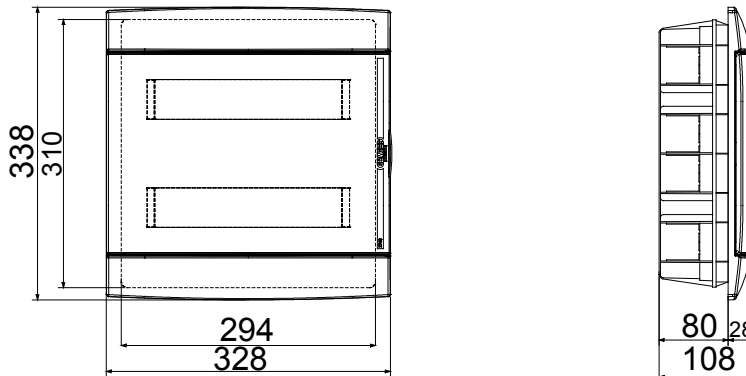

### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

