Product Data Sheet

DX26732W

RKקו המוצרים

Light rigid conduits RK9 HF range, made of PP, classification 23431, available in four diameters, from 16 to 32 mm, 3-metre long in white RAL 9010. Halogen free according to the Standard EN 50642. Suitable for electrical and/or data transmission systems in the tertiary and offices, where aesthetic is a plus. They can be integrated with spiralled sheaths and wall mounting enclosures. Completing the offer, a wide range of accessories and routing components from IP40 to IP67 protection rating. The RK9 HF conduits comply with Product Standard EN 61386-1 and EN 61386-21.

צבע	לבן RAL 9010	חומר	PP HF
אורך(מ')	3	קוטר צינורות(מ"מ)	32
בדיקת תיל לוהט	960 °C	סוג חומר	Halogen free in compliance with EN 50642
התנגדות לדחיסה	2 (320N - אור)	התנגדות למכות	3 (2 J - בינוני)
התנגדות לכפיפה	1 (קשיח)	חשמלי מאפיינים	2 (עם מאפייני בידוד חשמלי)
הגנה מפני חדירה של עצמים מוצקים ללא אביזרים	0	הגנה מפני חדירת מים עצמים ללא אביזרים	0
התנגדות נגד קורוזיה	לא ישים עבור מערכות צינורות פלסטיק	עמידות באש	1 (ללא התפשטות אש)
הגנה מפני חדירת מוצקים עצמים עם אביזרים	4/6 (תלוי באביזרים שבהם נעשה שימוש)	הגנה מפני חדירת מים עם אביזרים	0/5/7 (תלוי באביזרים שבהם נעשה שימוש)
Halogen Free	Yes, according to EN 50642	סטנדרט	EN 61386-21 EN 61386-1
סיווג	23431		

DIMENSIONAL

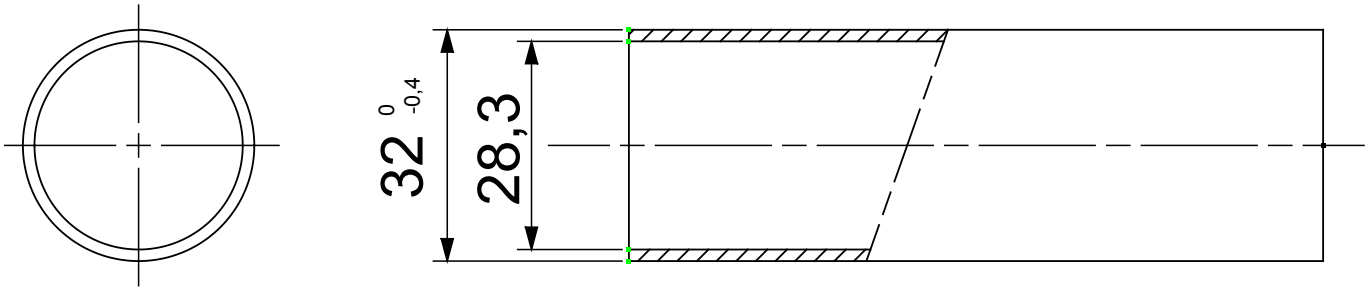

TECHNICAL SYMBOLOGY

960 °C

STANDARDS/APPROVALS

GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 03/07/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice