




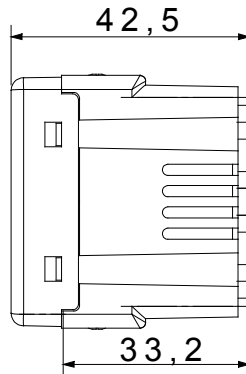

The System modular devices make it possible to create infinite combination between devices and plates, thanks to a complete range that is able to satisfy all design, functional and installation requirements. Colour and finiture: glossy white, bright and versatile  
The range includes commands, socket- outlets, protection, indicators, connectors and devices for the control, safety and comfort of your home.

Kategori	Röle	Çıkış kontakları	1 NA/NK 10A(AC1) / 4A(AC15) 250V ac
Tanım	darbe akım rölesi	Renk	Beyaz
Kutup adedi	1	Voltaj	230 V ac
Standart	EN 60669-1 / EN 60669-2-2	Frekans	50Hz
Test voltajındaki rezistans	1 dak. için 2000 V a 50 Hz	Yalıtım direnci	> 5 MOhm
Kablolama terminalleri	Vidalı	Uzatılmış kullanım (konum değişiklikleri sayısı)	40.000, 250 V ac $\cos\phi=0,6$
Bilyeli termo sıcaklık	125 °C	Akkor Tel Deneyi:	850 °C
Kablo çekmede terminal tutuşu	> 50 N	Terminal sıkıştırma kapasitesi esnek kablolar (mm <sup>2</sup> )	min. 0,75 - maks. 2x4
Terminal sıkıştırma kapasitesi sert kablolar (mm <sup>2</sup> )	min. 0,5 - maks. 2x2,5	SYSTEM modül sayısı	1
Anma gücü (AC1)	2300 VA	Nominal güç (AC15)	500 VA
230V akkor/halojen lambalar	-	Elektronik balastlı floresan lambalar	0 W
Dengelenmiş balastlı floresan lambalar	0 W	CFL lambaları	0 W
230V LED lambalar	0 W	Elektronik transformatörlü halojen/LED lambalar	0 W
Elektromekanik transformatörlü halojen/LED lambalar	0 W	Malzeme	Teknopolimer
Elektrokod	140		

### DIMENSIONAL



### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

