



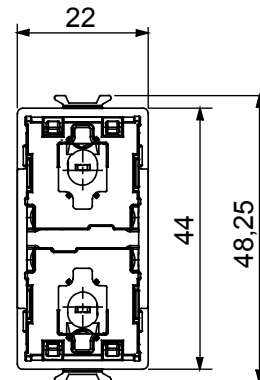

Flush-mounting axial auxiliary module with two commands. Two axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the front buttons key available.

|   |  |  |                           |
|---|--|--|---------------------------|
| Description   | 2-channel auxiliary axial control  | Power supply                                   | 100 ÷ 240 V ac - 50/60 Hz |
| No. modules   | 1  | No. input channels                             | -                         |
| Local control   | Via 2 front push buttons (to complete with button key)                   | Auxiliary input channel voltage                | -                         |
| Stocking temperature  | -25 ÷ +70 °C   | N. of LED input channels                       | 2                         |
| Working temperature   | -5 ÷ +45 °C  | LED input channels voltage                     | 100 ÷ 240 V ac - 50/60 Hz |
| Relative humidity (non-condensative)                            | Max 93%  | No. output channels                            | 2                         |
| Front light signaling   | Blue led   | Output contacts                                | n. 2 x 1A (AC1)           |
| Wiring terminals  | With screw   | 240 V ac Incandescent-halogen lamps            | -                         |
| Terminal tightening capacity stranded cables (mm <sup>2</sup> ) | Max. 1,5   | 240 V ac LED lamps                             | -                         |
| Terminal tightening capacity solid cables (mm <sup>2</sup> )    | Max. 1,5   | Loads piloted from electronic transf. 240 V ac | -                         |
| Context   | Dry indoor places  | 240 V Fluorescent lamps                        | -                         |
| IP degree   | IP20 (with button key)   | Load control                                   | -                         |
| Standard  | 2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000 |  |                           |

### DIMENSIONAL

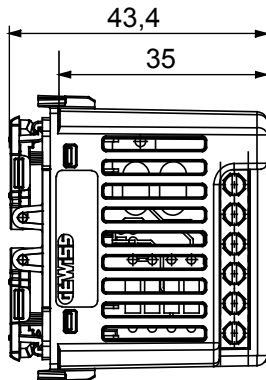

### TECHNICAL SYMBOLOGY

## IP

IP20 (with button key)

### STANDARDS/APPROVALS

