




|                                                                |                         |
|----------------------------------------------------------------|-------------------------|
| Description                                                    | RESIDUAL CURRENT DEVICE |
| Code                                                           | BD                      |
| No. of poles                                                   | 2P                      |
| No. modules                                                    | 2                       |
| Rated current                                                  | 63 A                    |
| Rated residual operating current                               | 30 mA                   |
| Type                                                           | A[IR]                   |
| Rated voltage (IEC/EN 61009-1 app. G, IEC/EN 61009-2-1 app. G) | 230V                    |

|                         |                                                |                                        |                        |
|-------------------------|------------------------------------------------|----------------------------------------|------------------------|
| Standard                | IEC/EN 61009-1 app. G, IEC/EN 61009-2-1 app. G | Rated frequency (Hz)                   | 50/60 Hz               |
| Insulation voltage (Ui) | 500 V                                          | Rated impulse withstand voltage (Uimp) | 4 kV                   |
| Overvoltage category    | III                                            | Level of immunity (8/20 μs)            | 3000 A                 |
| Section rigid cable     | Max 35 mm <sup>2</sup>                         | Section flexible cable                 | Max 35 mm <sup>2</sup> |
| Operating temperature   | -25 +40 °C                                     | Stocking temperature                   | -40 +70 °C             |
| Rated tightening torque | 2 Nm                                           | Assembly position                      | Any                    |

### DIMENSIONAL

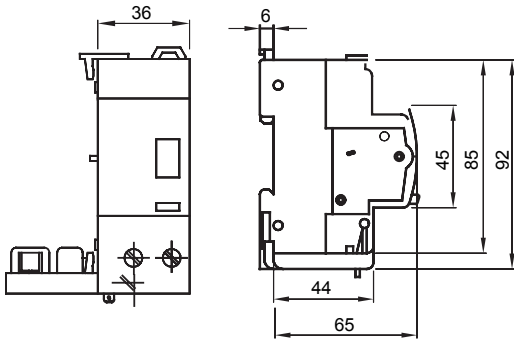

### WIRING DIAGRAM



### STANDARDS/APPROVALS

