




Kit for emergency use equipped with Ni-Cd battery with 3h autonomy after 24h of recharge. Equipped with a test button to check the status of the battery, it must be positioned on the luminaire. Warranty 2 years, battery and inverter excluded. Compatible with the following ranges: ELIA AL, ELIA DL and ELIA PL. NOT COMPATIBLE with the ELIA PL IP65 range.

| | | | |
|------------------------|------------------|------------------|---|
| Description | Emergency kit 3h | Series | ELIA AL, ELIA DL, ELIA PL, ELIA PL BACKLIT, VISIO [16] - NOT COMPATIBLE WITH ELIA PL IP65 |
| Type | Emergency kit | Version | Permanent 3 h |
| Power | 4 W | Application | Internal |
| Operating temperature | 0 +25 °C | IP degree | IP20 |
| Mechanical resistance | IK03 | Autonomy | 3 h |
| Fixing | Device edge | Insulation class | II |
| Power supply batteries | Replaceable | Voltage | 220-240 V - 50/60 Hz |
| Charging time | 24 h | Weight (kg) | 0.8 |
| Electrocod | 2419 | | |

DIMENSIONAL

PHOTOMETRIC DISTRIBUTION

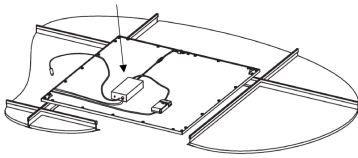

TECHNICAL SYMBOLOGY



IP20

IK

IK03



STANDARDS/APPROVALS

