




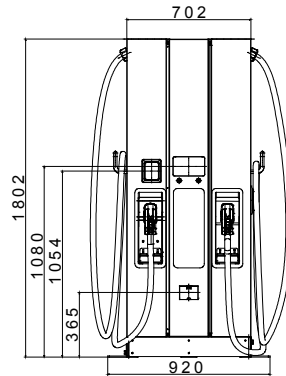

I-FAST products are JOINON's DC fast-charging solutions ideal for charging all types of electric vehicles equipped with high-voltage systems in private or public high-rotation parking lots, highways and service areas. The offer consists of wallboxes up to 30 kW and stations up to 180 kW. They feature an elegant design and finishes that make them an urban and extra-urban furnishing product, with a graphic display for a better User Experience and use of services for the EV Driver user.

|  |  |                                   |   |
|--|--|-----------------------------------|---|
| <b>Power specification - AC input</b>  |  | <b>Environmental</b>              |   |
| Input voltage                          | 3Φ 380 + 415 Vac   | Operating temperature             | -30°C + +50 °C                            |
| AC input connection                    | 3P+N+PE (Wye configuration), TN/TT   | Humidity                          | 5% + 95% RH, Non-Condensing               |
| Max input current                      | 3Φ 86A   | Altitude                          | ≤ 2.000 m                                 |
| Frequency                              | 50 Hz / 60 Hz  | IP degree                         | IP55                                      |
| Power factor                           | > 0.99   | Mechanical resistance             | IK10 (not including screen & RFID module) |
| Efficiency                             | >94%   | Cooling method                    | Fan cooling                               |
| <b>Power specification - DC output</b> |  | <b>Mechanical</b>                 |   |
| Output voltage range                   | CCS2: 150 + 950 Vdc  | Dimension                         | 700 mm x 330 mm x 1.800 mm                |
| Max output current                     | CCS2: 120A   | Weight                            | 235 kg                                    |
| Maximum output power                   | 60 kW  | Cable length                      | 4 m                                       |
| Voltage/Current accuracy               | ±2%  | <b>Protection</b>                 |   |
| <b>User interface &amp; control</b>    |  | - Input protection                |   |
| Display                                | 7" LCD   | OVP, OCP, OPP, OTP, UVP, RCD, SPD |   |
| Push buttons                           | Operation Buttons / Emergency Stop Button  | Output protection                 |   |
| User Authentication                    | RFID: support ISO 14443A/B, ISO 15693, FeliCa Lite-S (RCS966), OCPP 1.6 JSON, QR Code, App | SCP, OCP, OVP, LVP, OTP, IMD      |   |
|  |  | <b>Regulation</b>                 |   |
| Meter                                  | Integrated DC Meter  | Certificate                       |   |
| <b>Communication</b>                   |  | - Charging interface              |   |
| External                               | Ethernet, Wi-Fi and 4G   | DIN 70121, ISO 15118              |   |
| Internal                               | CAN bus / RS485  | <b>Contactless Solution</b>       |   |
|  |  | Payment terminal                  |   |
|  |  | Yes, Payter P66                   |   |

### DIMENSIONAL



### TECHNICAL SYMBOLOGY

**IP**

**IK**

IP55

IK10 (not including screen & RFID module)

### STANDARDS/APPROVALS

