




Support for fixing modular devices of the ChoruSmart residential series, made of technopolymer with ribenhanced structure that guarantees high performance. Suitable for flush-mount or wall-mount boxes, equipped with screw fixing systems. The convenient front coupling/disconnect system of ChoruSmart modular devices also allows you to house modular devices with 1/2, 1 and 2 modules.

| | | | |
|------------------|-------------------------------|-------------------|--|
| Beschreibung | 2 Einsätze | Merkmale | Halogenfrei |
| Befestigung | Mit Schrauben (nicht mitgel.) | Für Dose | Rund/Quadrat (einzeln oder horizontal) |
| Glühdrahtprüfung | 650 °C | Kugeldruckprüfung | 70 °C |
| Norm | EN 60669-1 | Kompatibilität | Für EGO SMART Rahmen (auch kompatibel mit EGO und anderen ChoruSmart Rahmen) |
| Electrocod | 0122 | | |

Abmessungen

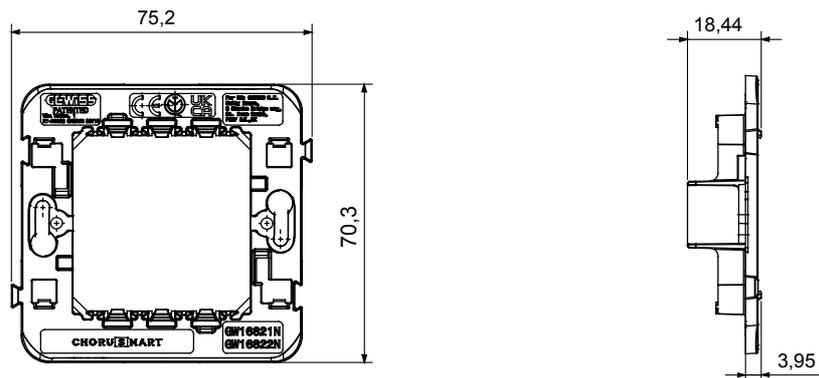

Technische Symbole



GWT

650 °C



70 °C

Normen / Richtlinien

