

# Product Data Sheet

## GW40239VA

40 CDI Range




The widest range of flush-mounting switchboards and distribution boards available on the market today. Seven families designed to offer solutions in the residential and advanced tertiary sectors, also available in Halogen Free material. Versions from 2 to 72 modules, degrees of protection from IP40 to IP55 and specific versions also for plasterboard. Furthermore, the offer includes Multimedia Enclosures in compact (36 modules) and complete (54 modules) versions, both compliant with what is suggested by the CEI 306-2 guide.

Insulation class	II (according to IEC 61140 standards)	Colour	Varnished slate
Outer dim. LxHxD (mm)	328x493x118	IP degree	IP40
Installation	Flush mounting enclosures	Dispersible power (W)	42
Mechanical resistance	IK08	Rated voltage	400 V
Door colour	Smoked Transparent	No. of modules EN 50022	36+3 (12x3)
Rated current	125 A	Glow Wire Test	650 °C
For walls	Brickwall	Operating temperature	-15 ÷ +60°C
Type of material	Halogen-free in compliance with EN 60754-2	Thermo-pressure with ball	70 °C
Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Insulation voltage	750 V
Max. installable terminal blocks	3 x 12 modules		


### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not resistant	Limited resistance	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

### DIMENSIONAL

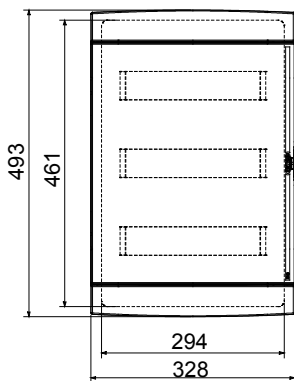

### TECHNICAL SYMBOLOGY



IP  
IP40

IK  
IK08

GWT  
650 °C



### STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 16/11/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice