




Wirelessly connected device with Zigbee protocol from the ChoruSmart system. It can be used with Home Gateway for "CONNECTED SMART HOME" solutions and with Smart Gateway for "HOME AND BUILDING PRO" solutions. Ideal for residential and small commercial offices, new builds and renovations. Zigbee technology is a secure and reliable technology in which data is encrypted and every node within the network ensures reachability across all devices (mesh network). This device can also be used without Home Gateway and Smart Gateway (manual configuration with dip-switch or via IoT Configurator), in which case supervision via the app is not possible.

| | | | |
|-----------------------|--------------------|--------------------------------------|---|
| Category | Contacts interface | Communication protocol | Zigbee (IEEE 802.15.4) |
| Supply voltage | 230V ac - 50 Hz | Output power | 8 dBm |
| No. input channels | 2 | Input voltage | 230V ac |
| Max cable length | - | Standard | 2014/53/EU, EN 60669-2-1, EN 60669-1, ETSI EN 300-328 |
| IP degree | IP20 | Working temperature | -5 ÷ +45 °C |
| Stocking temperature | -25 ÷ +70 °C | Relative humidity (non-condensative) | Max 93% |
| Dimensions LxHxD (mm) | 42x40x20 | Electrocod | 051A |

DIMENSIONAL

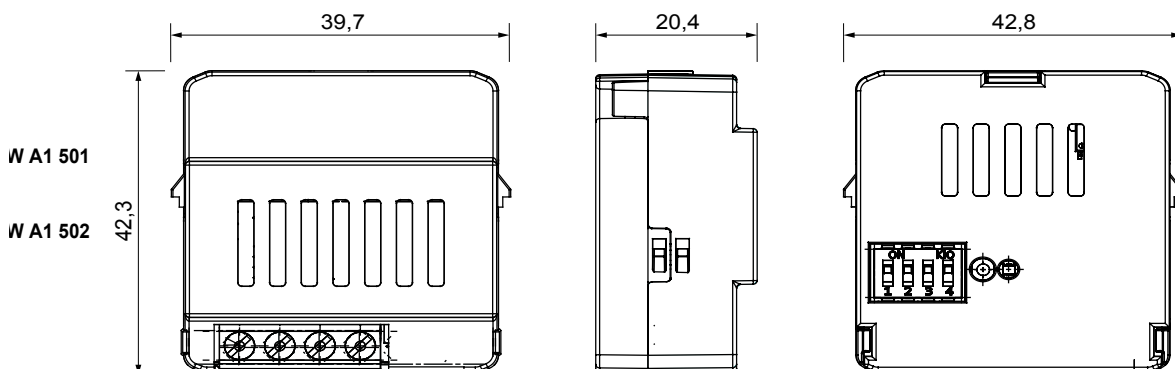

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

