




Complete system for the connection and distribution of LAN networks in residential and tertiary sector environments.

The range includes fibre optic solutions, wall panels, floor cabinets and copper wiring products. The Data Center series provides all the products necessary to create a multi-service fibre optic infrastructure for residential buildings, in full compliance with all the indications dictated by the new CEI Guidelines 306-2 and Law 164/14.

kategoria	Złącze optyczne	Kolor kabla	Biały
Liczba światłowodów	8	Długość (mm)	50 m
Ø osłony	3,8 mm	Ø osłony do ciągnięcia	< 5 mm
Dla złączy	SC/APC - Fiber Fast	Klasyfikacja	G.657.A2 / B6_a2 Bend Insensitive
Ø rdzenia	9 µm	Ø okładziny	125 µm
Element wytrzymałościowy	Kevlar	Plaszcz zewnętrzny	LSZH
Kabel	Loose - OS2	Klasa CPR	Eca
Napężenie	100 N	Gniecenie	500 N/10cm
Minimalny promień gięcia (dynamiczny)	20x średnica kabla	Minimalny promień gięcia (statyczny)	10x średnica kabla
Maksymalne tłumienie (@1310 nm / @1550 nm)	0.35 dB/Km (@1310 nm) / 0.2 dB/Km (@1550 nm)	Długość Temperatury	Od -20°C do +60°C

DIMENSIONAL

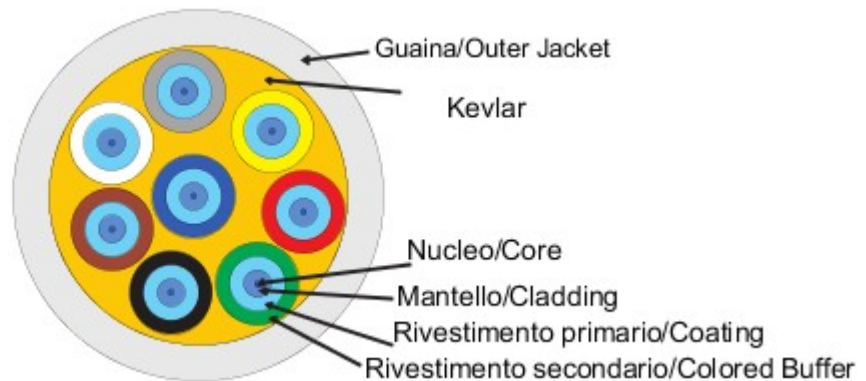

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 17/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice