

ESALITE HB



Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct lighting is provided by an optical system composed of different versions of lenses. Silicone gaskets, Goretex breathing and anti-condensation device, 2 waterproof connectors for 1.5 mm² cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.


GENERAL INFORMATION

Context	Logistics and industrial manufacturing lighting
Luminaire	LED Industrial Reflector
Zastosowanie	Wewnętrzny
Unique digital code (Datamatrix)	Datamatrix
Kolor	Szary RAL 9006
Rodzaj źródła światła	Dioda LED - Niewymienna
Moc	420 W
LED Lifetime	L90B10 (Tq 25°) 100000 h; L90B10 (Tq 50°) 55000 h
Masa (kg)	22.5
Gwarancja	5 lat
Temperatura przechowywania	-25°C + +70°C / HR 10% + 85%
Operating temperature	-25°C + +50°C
MATERIALS	
Body	Aluminium odlewane ciśnieniowo
Typ osłony	High transparency PMMA
Optic	PMMA lens
Gasket	Silicon
Locking Hook	-
External screw	Stainless steel
Colour	Polyester powder coated
STANDARDS AND APPROVALS	
Klasyfikacja	-
Urządzenie z ograniczoną temperaturą powierzchni	-
Świadectwo wg DIN 18032-3	Nie
IPEA	-
Klasa Izolacji	I
Ochrona IP	IP65
Odporność na wstrząsy	IK07
Próba rozżarzoną drutem	650 °C


OPTIC AND ILLUMINATING FEATURES

Optyka	Średni 60°
Unified Glare Rating	UGR ≤ 28
Moc z oprawy (lm)	48300
Efficiency (lm/W)	115
Temperatura Barwowa	4000 K
Color Rendering Index	CRI>80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0
Norma	EN60598-1; IEC 62778; IEC62471
ELETRICAL AND LIGHTING FEATURES	
Zasilanie wyjściowe	220-240 V
Prąd częstotliwość (Hz)	50/60 Hz
Driver	Included
Driver failure rate	F10 = 100.000h Tq25°C/50.000h Tq40°C
Overvoltage protection	DM 6KV / CM 8KV
Control System	DALI
INSTALLATION AND MAINTENANCE	
Mouting and installation	Suspended
Tilt	Not possible
Wiring	With watertight connector
Mocowanie	-
Optic Maintenance	Not available
LED Maintenance	Not available
Driver Box	Wbudowana
Maksymalna powierzchnia wystawiona na działanie wiatru	0,42 m ²
-	-
-	-
-	-
-	-

DIMENSIONAL

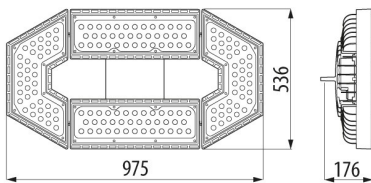

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP
IP65

IK
IK07

GWT
650 °C

STANDARDS/APPROVALS



Data, measures, designs and pictures are for information purpose only, last update 10/05/2021. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>. - 1 of 2

